

SENTINEL-3 AND -6 SLR YEARLY REPORT – 2022


COPERNICUS SENTINEL-1, -2, -3 AND -6 PRECISE ORBIT DETERMINATION SERVICE (CPOD)


29/03/2023

Prepared by: X 
CPOD Team
Project Engineer
Signed by: Jaime Fernández Sánchez

 Recoverable Signature

29/03/2023

Approved by: X 
J. Aguilar
Quality Manager
Signed by: Juan Antonio Aguilar Miguel

Authorised by: X 
J. Fernández
Project Manager
Signed by: Jaime Fernández Sánchez

Document ID: GMV-CPOD-SLR-0007
DIL Code: TD-17
Internal Code: GMV 21008/23 V2/23
Version: 1.1
Date: 29/03/2023
ESA contract number: 4000132155/21/I-BG

DOCUMENT STATUS SHEET

| Version | Date | Pages | Changes |
|---------|------------|-------|---|
| 1.0 | 22/02/2023 | 50 | First version |
| 1.1 | 29/03/2023 | 52 | Update reference documents (section 1.5) Include new station: 7124, 7237, 7701, 7824, 7827, 7838, (figures and tables in section 3.2) (not tracked) To remove station 7080 (section 3.2) Include whole time series of station biases (figures and tables in section 3.2) (not tracked) Include new stations 7701 and 7827 (Annex A) |

TABLE OF CONTENTS

| | |
|--|----|
| 1. INTRODUCTION | 7 |
| 1.1. PURPOSE | 7 |
| 1.2. SCOPE | 7 |
| 1.3. DISCLAIMER..... | 7 |
| 1.4. DEFINITIONS AND ACRONYMS | 7 |
| 1.5. APPLICABLE AND REFERENCE DOCUMENTS..... | 8 |
| 1.5.1. APPLICABLE DOCUMENTS | 8 |
| 1.5.2. REFERENCE DOCUMENTS..... | 8 |
| 2. GENERAL OVERVIEW..... | 9 |
| 3. VALIDATION OF THE SENTINEL-3 AND -6A ORBIT SOLUTIONS | 16 |
| 3.1. CALCULATION OF THE SENTINEL-3 AND -6A COMBINED ORBIT SOLUTION | 16 |
| 3.2. ESTIMATION OF THE RANGE BIASES FOR ALL SLR STATIONS | 21 |
| 3.3. SLR RESIDUALS PER ORBIT SOLUTION | 38 |
| 4. CPF PREDICTIONS..... | 47 |
| 5. CONCLUSIONS | 49 |
| 6. ANNEX: STATIONS COORDINATE LIST | 50 |

LIST OF TABLES

| | |
|---|----|
| Table 1-1: Acronyms..... | 7 |
| Table 1-2: Applicable Documents..... | 8 |
| Table 1-3: Reference Documents..... | 8 |
| Table 3-1: List of the centres providing orbit solutions for the generation of the combined orbit solution (labelled as COMB) of the Sentinel-3 and -6 satellites..... | 16 |
| Table 3-2: Summary of the mean, and STD values per satellite component of the orbital comparisons between CPOF and CNES Sentinel-3A orbit solution and the Sentinel-3A combined orbit solution during 2022..... | 20 |
| Table 3-3: Summary of the mean, and STD values per satellite component of the orbital comparisons between CPOF and CNES Sentinel-3B orbit solution and the Sentinel-3B combined orbit solution during 2022..... | 20 |
| Table 3-4: Summary of the mean, and STD values per satellite component of the orbital comparisons between CPOF and CNES Sentinel-6A orbit solution and the Sentinel-6A combined orbit solution during 2022..... | 20 |
| Table 3-5: Mean value of the range biases [1-way; mm] of each SLR station tracking Sentinel-3A and Sentinel-3B satellites in 2022 used to calculate the SLR residuals..... | 36 |
| Table 3-6: Mean value of the range biases [1-way; mm] of each SLR station tracking Sentinel-6A satellite in 2022 used to calculate the SLR residuals..... | 37 |
| Table 3-7: Summary of the mean, STD and RMS of the Sentinel-3A and Sentinel-3B SLR observation residuals [1-way; cm] obtained from all orbit solutions in 2022..... | 45 |
| Table 3-8: Summary of the mean, STD and RMS of the Sentinel-6A SLR observation residuals [1-way; cm] obtained from all orbit solutions in 2022..... | 46 |
| Table 4-1: Manoeuvre days on the Sentinel-3 satellites during 2022..... | 47 |
| Table 4-2: Summary of the mean, STD and RMS of the orbital comparisons between the Sentinel-3 CPF predictions and the Sentinel-3 CPOD STC products during 2022..... | 48 |
| Table 4-3: Percentiles of the orbital comparisons [3D RMS] between the Sentinel-3 CPF predictions and the Sentinel-3 CPOD STC products during 2022..... | 48 |
| Table 6-1: Geographical location and coordinates (SLRF2014) of all SLR stations that have ever tracked Sentinel-3 and Sentinel-6 satellites..... | 50 |

LIST OF FIGURES

| | |
|--|----|
| Figure 2-1: Properties of Sentinel-3 satellites and location of the LRR | 9 |
| Figure 2-2: Properties of Sentinel-6A satellite and location of the LRR..... | 9 |
| Figure 2-3: ILRS stations tracking Sentinel-3 and Sentinel-6 satellites (the field of view is depicted with a cut-off angle of 15°; below there is a zoom-in of the European region) | 10 |
| Figure 2-4: ILRS mission priority list at the time of writing the document | 11 |
| Figure 2-5: Total number of satellite passes per GPS week since the beginning of the satellite mission (Sentinel-3A and Sentinel-3B) | 12 |
| Figure 2-6: Total number of satellite passes per GPS week in 2022 (Sentinel-3A and Sentinel-3B) ... | 12 |
| Figure 2-7: Total number of satellite passes per GPS week since the beginning of the satellite mission (Sentinel-6A) | 13 |
| Figure 2-8: Total number of satellite passes per GPS week in 2022 (Sentinel-6A)..... | 13 |
| Figure 2-9: Total number of satellite passes per SLR station since the beginning of the satellite mission (Sentinel-3A and Sentinel-3B) | 14 |
| Figure 2-10: Total number of satellite passes per SLR station in 2022 (Sentinel-3A and Sentinel-3B) | 14 |
| Figure 2-11: Total number of satellite passes per SLR station since the beginning of the satellite mission (Sentinel-6A)..... | 15 |
| Figure 2-12: Total number of satellite passes per SLR station in 2022 (Sentinel-6A) | 15 |
| Figure 3-1: Orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-3A orbit solution and the Sentinel-3A combined orbit solution | 17 |
| Figure 3-2: Mean and STD of the orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-3A orbit solution and the Sentinel-3A combined orbit solution..... | 17 |
| Figure 3-3: Orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-3B orbit solution and the Sentinel-3B combined orbit solution | 18 |
| Figure 3-4: Mean and STD of the orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-3B orbit solution and the Sentinel-3B combined orbit solution..... | 18 |
| Figure 3-5: Orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-6A orbit solution and the Sentinel-6A combined orbit solution | 19 |
| Figure 3-6: Mean and STD of the orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-6A orbit solution and the Sentinel-6A combined orbit solution..... | 19 |
| Figure 3-7: Daily total number of the accepted SLR observations of all SLR stations tracking Sentinel-3A and Sentinel-3B satellites in 2022 | 21 |
| Figure 3-8: Daily total number of the accepted SLR observations of all SLR stations tracking Sentinel-6A satellite in 2022 | 21 |
| Figure 3-9: Evolution of the range biases [1-way; mm] calculated for each SLR station tracking Sentinel-3A and Sentinel-3B satellites in 2022..... | 26 |
| Figure 3-10: Evolution of the range biases [1-way; mm] calculated for each SLR station tracking Sentinel-6A satellite in 2022 | 33 |
| Figure 3-11: Mean, STD and RMS of the Sentinel-3A range biases [1-way; mm] of each SLR station (the figure below is a zoomed-in of the figure above) | 34 |
| Figure 3-12: Mean, STD and RMS of the Sentinel-3B range biases [1-way; mm] of each SLR station (the figure below is a zoomed-in of the figure above) | 35 |
| Figure 3-13: Mean, STD and RMS of the Sentinel-6A range biases [1-way; mm] of each SLR station (the figure below is a zoomed-in of the figure above)..... | 36 |
| Figure 3-14: SLR observation residuals [1-way; cm] obtained for CNES orbit solution in 2022 (above Sentinel-3A, and below Sentinel-3B) | 39 |
| Figure 3-15: SLR observation residuals [1-way; cm] obtained for CPOF orbit solution in 2022 (above Sentinel-3A, and below Sentinel-3B) | 40 |
| Figure 3-16: SLR observation residuals [1-way; cm] obtained for COMB orbit solution in 2022 (above Sentinel-3A, and below Sentinel-3B) | 41 |
| Figure 3-17: SLR observation residuals [1-way; cm] obtained for CNES orbit solution in 2022 (Sentinel-6A) | 41 |

Figure 3-18: SLR observation residuals [1-way; cm] obtained for CPOF orbit solution in 2022 (Sentinel-6A).....42

Figure 3-19: SLR observation residuals [1-way; cm] obtained for COMB orbit solution in 2022 (Sentinel-6A).....42

Figure 3-20: Mean, STD and RMS of the Sentinel-3A SLR observation residuals [1-way; cm] from all orbit solutions in 2022 (above the range biases have not been fixed, below the range biases have been fixed).....43

Figure 3-21: Mean, STD and RMS of the Sentinel-3B SLR observation residuals [1-way; cm] from all orbit solutions in 2022 (above the range biases have not been fixed, below the range biases have been fixed).....44

Figure 3-22: Mean, STD and RMS of the Sentinel-6A SLR observation residuals [1-way; cm] from all orbit solutions in 2022 (above the range biases have not been fixed, below the range biases have been fixed).....45

Figure 4-1: Orbital comparisons [3D RMS; m] between the Sentinel-3 CPF predictions and the Sentinel-3 CPOD STC products during 2022.....48

1. INTRODUCTION

1.1. PURPOSE

This document has been prepared in the frame of the project *Copernicus POD Service*. It reports about the **Satellite Laser Ranging (SLR)** data of Sentinel-3A, Sentinel-3B and Sentinel-6A used by the Sentinel-3 and Sentinel-6 projects to perform periodic checks of the biases that could exist between the other tracking techniques (GNSS and DORIS), and to assess the accuracy of the operational Sentinel-3 and Sentinel-6 orbits. The covered period is year 2022.

1.2. SCOPE

This document is a deliverable by GMV to acknowledge the work of the **International Laser Ranging Service (ILRS) [RD.2]** community in supporting the Copernicus Sentinel-3 and Sentinel-6 missions. The main aspects that are highlighted herein are the data received from the ILRS, the results obtained from the SLR external validation and the Consolidated Prediction Files (CPFs) that the Copernicus POD (CPOD) Service provides to the ILRS laser stations in order to allow the tracking of the Sentinel-3 satellites.

1.3. DISCLAIMER

Sentinel-3 and Sentinel-6 missions, and in particular the CPOD Service, would like to thank the **ILRS Community** for their efforts and acknowledge the great contribution to the verification of the stringent accuracy requirements of the S-3 and S-6 altimetry missions. The SLR tracking data provided has proven to be an invaluable asset for independent orbit validation, allowing to assess the quality of the different available orbital products and ensure the best are used for the altimetry processing.

GMV, as prime contractor of the Copernicus POD Service, and the Copernicus POD Quality Working Group (QWG) members, consider satisfactory the performance of the SLR tracking. The content presented herein has been gathered with the purpose of informing the ILRS Community about the S-3 and S-6 SLR tracking statistics, the obtained residuals and how they contribute to the Sentinel-3 and Sentinel-6 orbital products validation. Those cases in which the reported results are worse than expected might either be related to a temporal problem with any given station or wrongly configured parameters at the POD processing (in particular, the station coordinates), not necessarily implying an issue with the observations themselves.

1.4. DEFINITIONS AND ACRONYMS

Acronyms used in this document and needing a definition are included in the following table:

Table 1-1: Acronyms

| Acronym | Definition | Acronym | Definition |
|---------|---|---------|---|
| AIUB | Astronomical Institute University of Bern | JPL | Jet Propulsion Laboratory |
| CLS | Collecte Localisation Satellites | LEO | Low Earth Orbit |
| CNES | Centre National d'Études Spatiales | LRR | Laser Retro-reflector |
| CPF | Consolidated Prediction Format | NAPEOS | NAavigation Package for Earth Orbiting Satellites |
| CPOD | Copernicus POD | OLCI | Ocean & Land Colour Instrument |
| DIL | Document Item List | PDGS | Payload Data Ground Segment |
| DLR | Deutsches Zentrum für Luft- und Raumfahrt | POD | Precise Orbit Determination |
| DORIS | Doppler Orbytography and Radiopositioning Integrated by Satellite | QWG | Quality Working Group |
| EGU | European Geosciences Union | RMS | Root Mean Square |
| ESA | European Space Agency | SAR | Synthetic Aperture Radar |

| Acronym | Definition | Acronym | Definition |
|----------|---|---------|---|
| ESOC | European Space Operation Centre | SINEX | Solution Independent Exchange |
| ESTEC | European Space research and TEchnology Centre | SLR | Satellite Laser Ranging |
| EUMETSAT | EUropean organisation for the exploitation of METeorological SATellites | SLSTR | Sea and Land Surface Temperature Radiometer |
| FTP | File Transfer Protocol | SRAL | SAR Radar Altimeter |
| GFZ | Geo Forschungs Zentrum | STC | Short Time Critical |
| GNSS | Global Navigation Satellite System | STD | Standard Deviation |
| GPS | Global Positioning System | TUD | Technische Universiteit Delft |
| IGS | International GNSS Service | TUM | Technische Universität München |
| ILRS | International Laser Ranging Service | USA | United States of America |
| ITRF | International Terrestrial Reference Frame | | |

1.5. APPLICABLE AND REFERENCE DOCUMENTS

1.5.1. APPLICABLE DOCUMENTS

The following documents, of the exact issue shown, form part of this document to the extent specified herein. Applicable documents are those referenced in the Contract or approved by the Approval Authority. They are referenced in this document in the form [AD.X]:

Table 1-2: Applicable Documents

| Ref. | Title | Code | Version | Date |
|--------|--|-----------------------------|---------|------------|
| [AD.1] | Sentinel-3A Mission Support Request Form | ESTEC_ILRS_MSUF_Sentinel-3A | 1 | 10/11/2015 |
| [AD.2] | Sentinel-3B Mission Support Request Form | ESTEC_ILRS_MSUF_Sentinel-3B | 3 | 15/01/2018 |

1.5.2. REFERENCE DOCUMENTS

The following documents, although not part of this document, extend or clarify its contents. Reference documents are those not applicable and referenced within this document. They are referenced in this document in the form [RD.X]:

Table 1-3: Reference Documents


| Ref. | Title | Code | Version | Date |
|--------|---|---------------------|---------|------------|
| [RD.1] | Analysis of elements for Sentinel-3 SLR tracking | GMV-GMESPOD-TN-0028 | 1.2 | 10/05/2018 |
| [RD.2] | Pearlman M.R., Noll C.E., Pavlis E.C., Lemoine F.G., Combrink L., Degnan J.D., Kirchner G., Schreiber U. (2019). "The ILRS: approaching 20 years and planning for the future", J. Geodesy, 93, 2161-2180, https://doi.org/10.1007/s00190-019-01241-1 | N/A | N/A | 2019 |

2. GENERAL OVERVIEW

The Copernicus Precise Orbit Determination (CPOD) Service is part of the Copernicus Payload Data Ground Segment (PDGS) of the Copernicus programme, which is an Earth observation programme coordinated and managed by the European Commission in partnership with the European Space Agency (ESA).

The Copernicus programme is in charge of the Sentinel missions, a series of satellites equipped with various Earth observation instruments in order to monitor, record and analyse environmental data and events around the globe. The monitoring of such events demands high levels of orbital accuracy, which requirements are satisfied by the CPOD Service, a consortium of different centres led by GMV. Thus, the CPOD Service is in charge of the provision of precise orbital products and auxiliary data files of the Sentinel satellites to the PDGS.

One of the Sentinel missions operated by the CPOD Service is the Sentinel-3 mission. This mission is currently using two satellites (Sentinel-3A and Sentinel-3B) to measure sea surface topography, sea and land surface temperature, and ocean and land surface colour with high accuracy and reliability. To that end, Sentinel-3 satellites are equipped with many instruments, among which there are an Ocean and Land Colour Instrument (OLCI), a Sea and Land Surface Temperature Radiometer (SLSTR), a SAR Radar Altimeter (SRAL), etc. In addition, the Sentinel-3 satellites are also equipped with a Laser Retro Reflector (LRR), which allows the tracking of the Sentinel-3 satellites by using a laser ranging from a network of Satellite Laser Ranging (SLR) stations belonging to the International Laser Ranging Service (ILRS). Figure 2-1 shows the location of the LRR reflector on the payload of the Sentinel-3 satellites. This figure also summarises a few properties of the orbit described by the Sentinel-3 satellites.

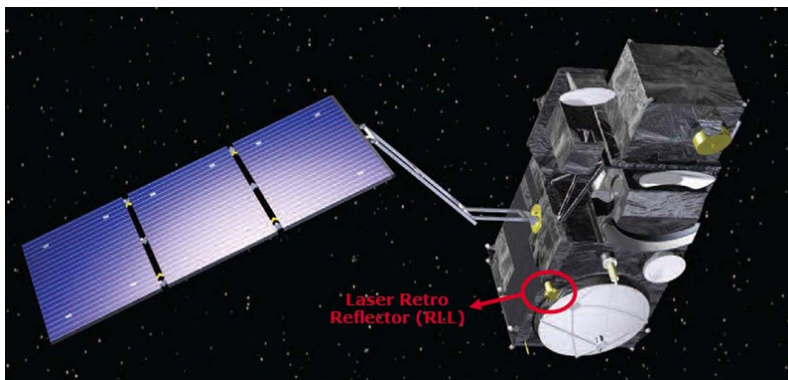


Properties of Sentinel-3 satellites

- Low Earth Orbit (LEO)
- Polar orbit
- Inclination: 98.65°
- Altitude: 814.5 km

Figure 2-1: Properties of Sentinel-3 satellites and location of the LRR

On the other hand, Sentinel-6 mission will ensure continuity to the JASON series of operational missions providing high precision ocean altimetry measurements. Figure 2-2 illustrates the location of the LRR on Sentinel-6A satellite and provides some extra information about the satellite orbit.

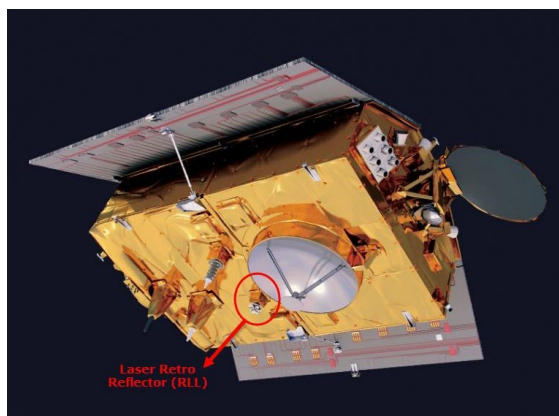

Properties of Sentinel-6A satellite

- Low Earth Orbit (LEO)
- Inclination: 66.0°
- Altitude: 1336 km

Figure 2-2: Properties of Sentinel-6A satellite and location of the LRR

The observations provided by the SLR stations are very valuable for the CPOD Service since they are used as an alternative source for validating the precise orbit solutions the CPOD Service generates through the Global Navigation Satellite System (GNSS) signals, especially from those obtained by means of the Global Positioning System (GPS) and Galileo (Sentinel-6A). For this, not only the CPOD Service but also ESA are very grateful for the support provided by the ILRS community, which helps at the long term validation and valorisation of the Sentinel-3 and Sentinel-6 orbit and science products.

Not all the SLR stations may track both Sentinel-3 satellites (see [AD.1], [AD.2] and [RD.1]) since high levels of laser energy could damage some instrument on-board the Sentinel-3 satellites (e.g., the OLCI receiver). This is not the case for Sentinel-6A satellite. Figure 2-3 shows the geographical location of all SLR stations tracking both families of satellites. More information about these SLR stations can be found in Table 6-1 of the annex.

From the figure below, it can be seen that an overall good geographical coverage is obtained given the available stations, with up to five stations in the southern hemisphere.

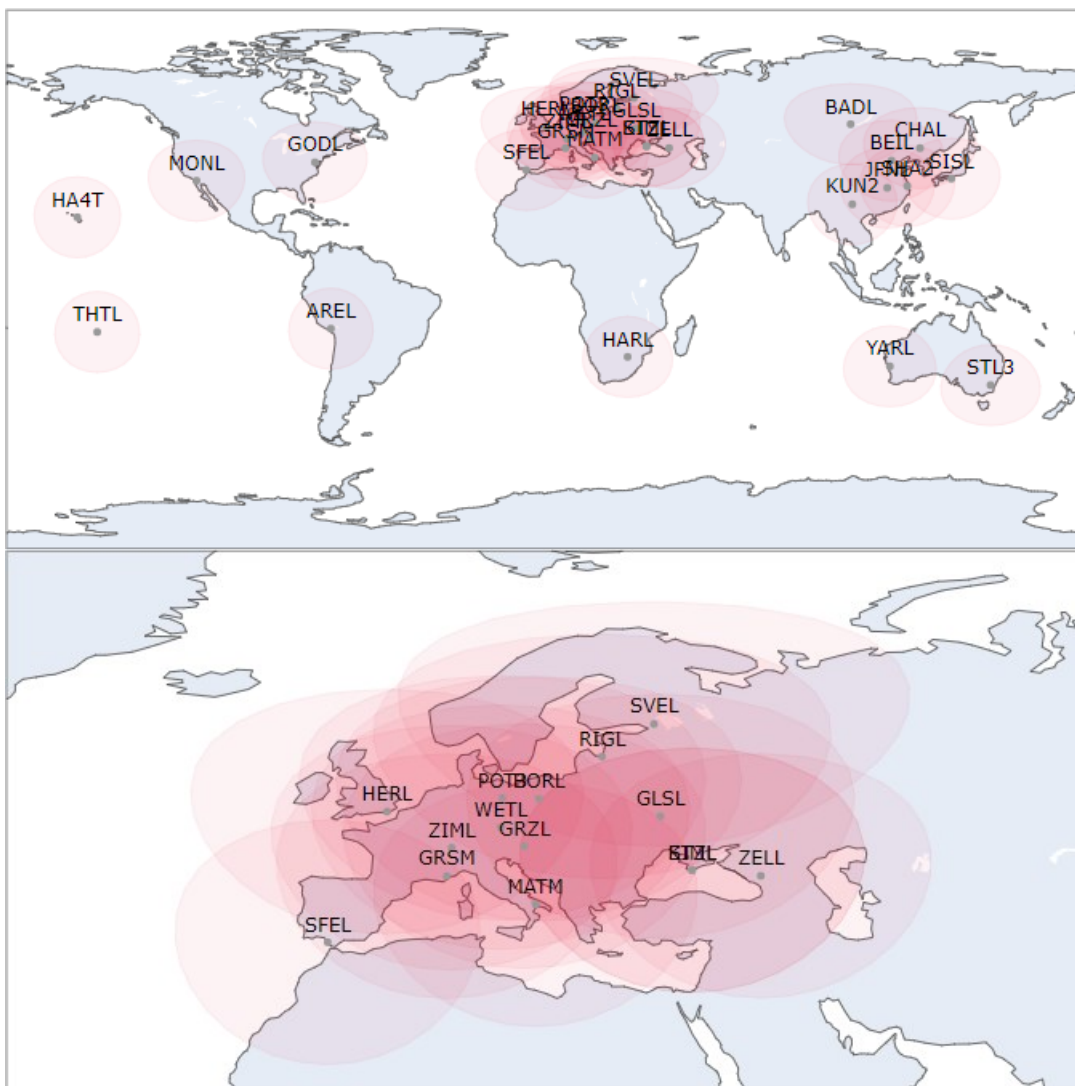


Figure 2-3: ILRS stations tracking Sentinel-3 and Sentinel-6 satellites (the field of view is depicted with a cut-off angle of 15°; below there is a zoom-in of the European region)

The tracking of the satellites from the SLR stations follows a mission priority list established by the ILRS community. This information is summarised in Figure 2-4, which particularly highlights the positions that the Sentinel-3 and Sentinel-6 satellites are occupying on the list at the time of writing this document. The complete priority list can be found in the official website of the ILRS community. As seen from the figure, Sentinel-3A, Sentinel-3B and Sentinel-6A are on the 7th, 8th and 17th position,

respectively, of all satellites considered by the ILRS community. Again, both ESA and the CPOD Service are very grateful that the ILRS community not only keeps tracking both satellites but continues to keep both satellites at this priority level.

| Priority | Mission | ILRS Name | COSPAR ID | SIC | Sponsor | Altitude (km) | Inclination (degrees) | Comments |
|----------|-----------------------|----------------------|--------------------|--------------|---|---------------|-----------------------|---|
| 1 | GRACE-FO-1/2 | gracefo1 gracefo2 | 1804701 1804702 | 0123 0124 | NASA JPL and the German Research Centre for Geosciences (GFZ) | 500 | 89 | 1-month campaign |
| 2 | ICESat-2 | icesat2 | 1807001 | 6873 | NASA | 496 | 92 | Restricted tracking; authorization required |
| 3 | CryoSat-2 | cryosat2 | 1001301 | 8006 | ESA | 450-720 | 92 | |
| 7 | Sentinel-3B | sentinel3b | 1803901 | 8011 | ESA/EUMETSAT | 814.5 | 98.65 | Restricted tracking; authorization required |
| 8 | Sentinel-3A | sentinel3a | 1601101 | 8010 | ESA/EUMETSAT | 814.5 | 98.65 | Restricted tracking; authorization required |
| 17 | Sentinel-6A/Jason-CSA | sentinel6a | 2008601 | 4380 | NASA, ESA, EUMETSAT, NOAA, CNES | 1339.4-1355.9 | 66.042 | |
| 18 | Jason-3 | jason3 | 1600201 | 4379 | NASA, CNES, Eumetsat, NOAA | 1,336 | 66.0 | |

Figure 2-4: ILRS mission priority list at the time of writing the document

Finally, this section concludes showing a general overview of the tracking of the Sentinel-3 and Sentinel-6 satellites from the SLR stations. The statistics shown below have been obtained from the *npt* files provided by the SLR stations on a daily basis. The figures show the number of passes that the SLR stations have retrieved from the Sentinel-3 and Sentinel-6 satellites during the entire satellite mission and also from the year 2022 in particular.

Figure 2-5 and Figure 2-6 show the temporal evolution on the **total number of satellite passes per GPS week** for the Sentinel-3A and Sentinel-3B. Figure 2-7 and Figure 2-8 for Sentinel-6A. This temporal evolution is shown for the entire missions in Figure 2-5 and Figure 2-7, whereas Figure 2-6 and Figure 2-8 only pays attention on the year 2022.

As seen in the figures, the number of Sentinel-3 and Sentinel-6A passes has remained quite constant (**between 50 and 150 passes**, a little bit higher for Sentinel-6A) during 2022. The number of passes are in line with the results obtained in the previous year.

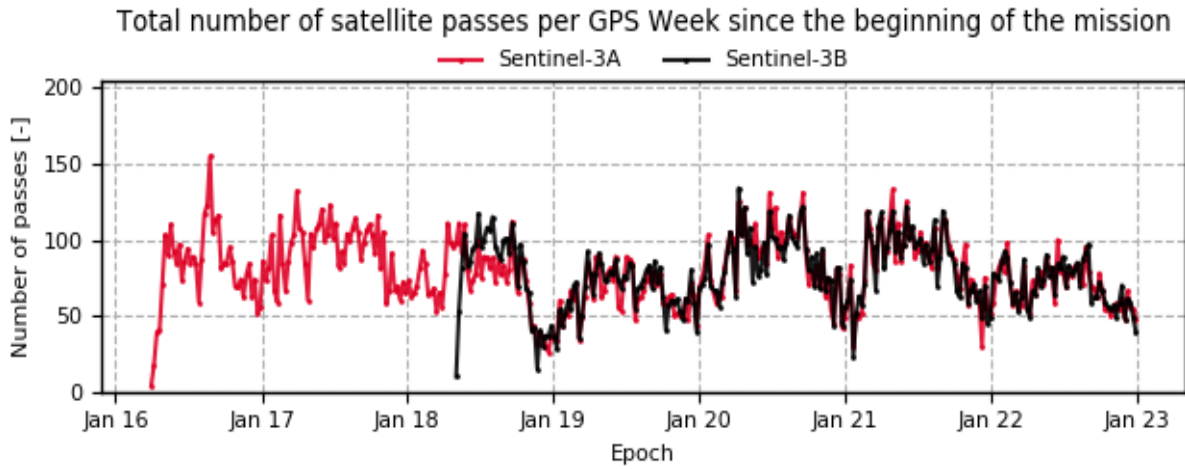


Figure 2-5: Total number of satellite passes per GPS week since the beginning of the satellite mission (Sentinel-3A and Sentinel-3B)

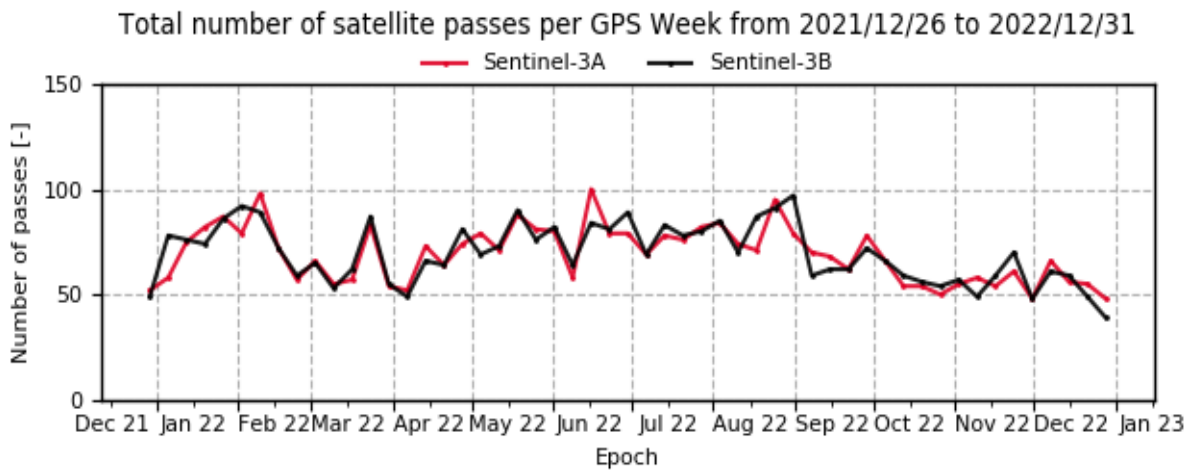


Figure 2-6: Total number of satellite passes per GPS week in 2022 (Sentinel-3A and Sentinel-3B)

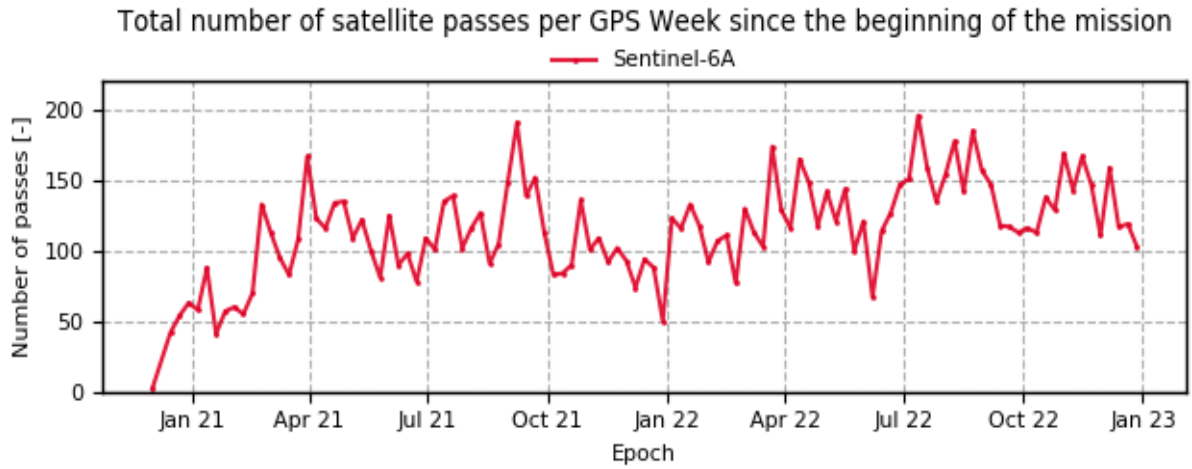


Figure 2-7: Total number of satellite passes per GPS week since the beginning of the satellite mission (Sentinel-6A)

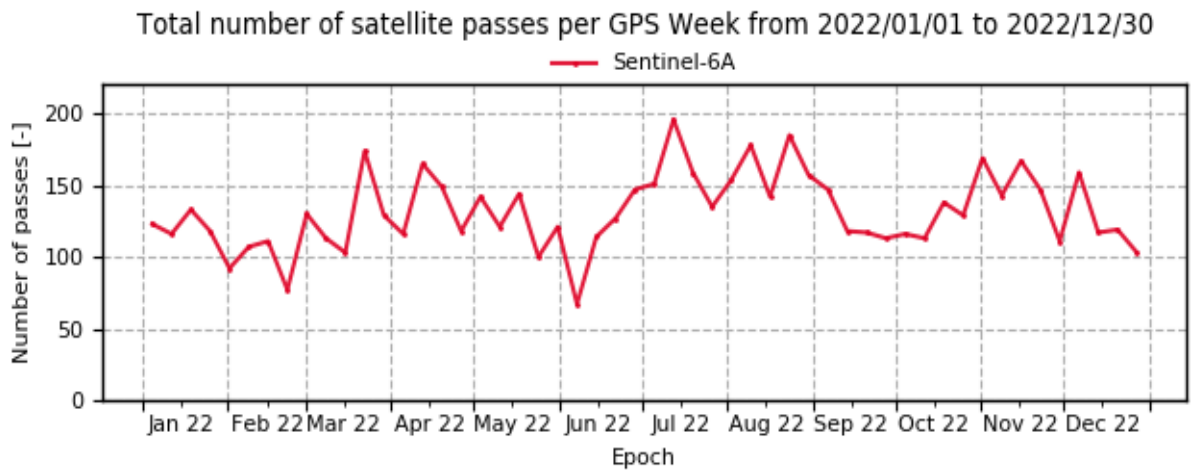


Figure 2-8: Total number of satellite passes per GPS week in 2022 (Sentinel-6A)

On the other hand, Figure 2-9 to Figure 2-12 present the **total number of satellite passes per SLR station**.

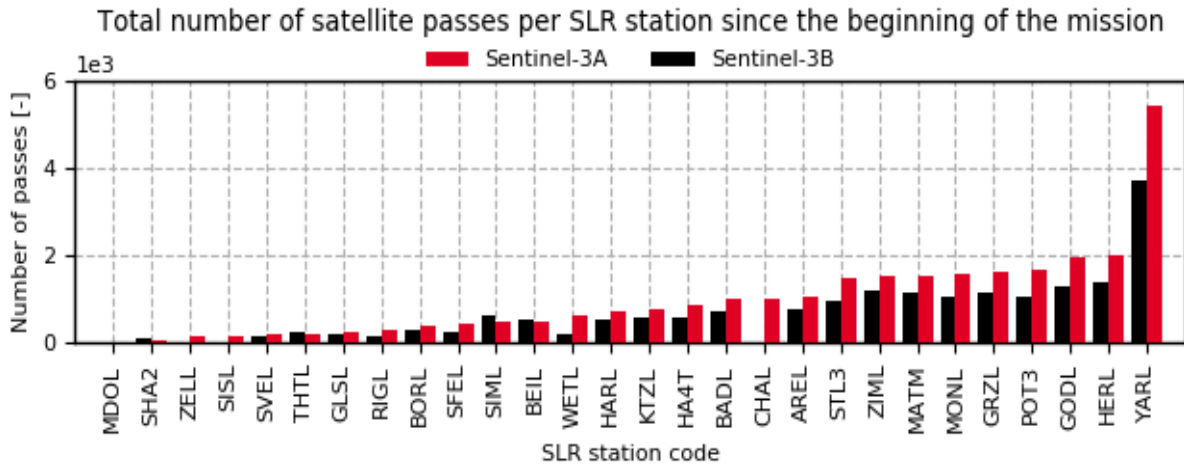


Figure 2-9: Total number of satellite passes per SLR station since the beginning of the satellite mission (Sentinel-3A and Sentinel-3B)

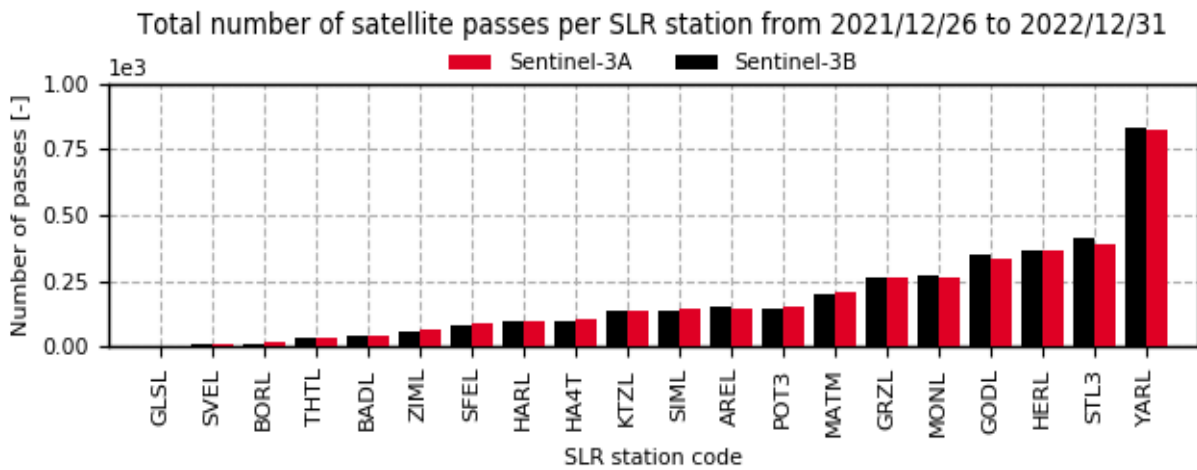


Figure 2-10: Total number of satellite passes per SLR station in 2022 (Sentinel-3A and Sentinel-3B)

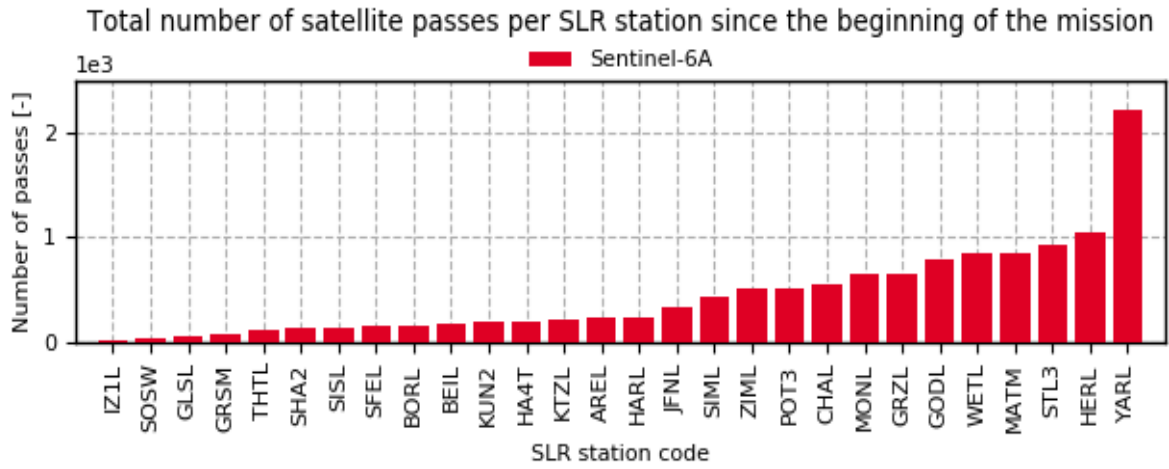


Figure 2-11: Total number of satellite passes per SLR station since the beginning of the satellite mission (Sentinel-6A)

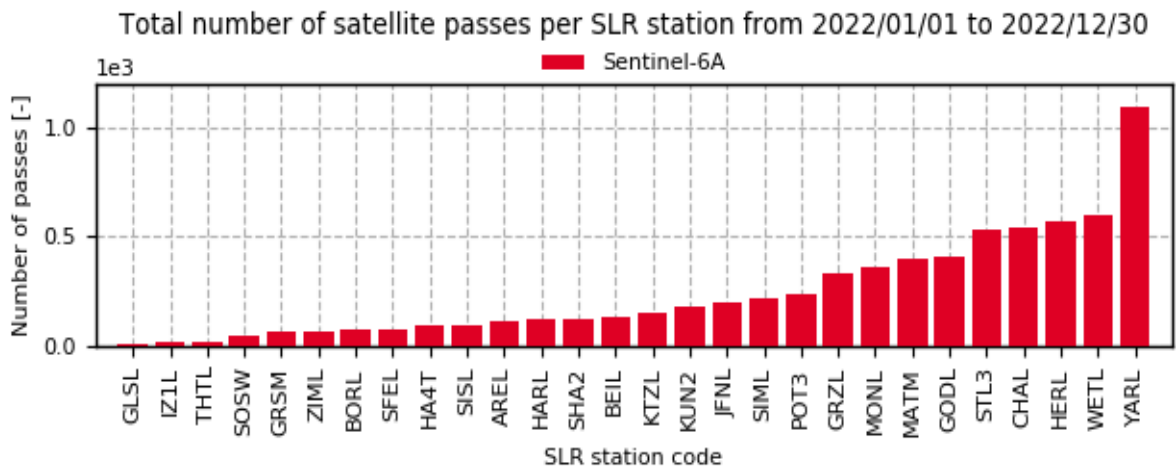


Figure 2-12: Total number of satellite passes per SLR station in 2022 (Sentinel-6A)

3. VALIDATION OF THE SENTINEL-3 AND -6A ORBIT SOLUTIONS

The SLR observations provided by the SLR stations have proven to be of high value in order to validate the precise Sentinel-3 and -6 orbit solutions being generated, for example, by the CPOD Service among others. However, not only the CPOD Service may benefit of an independent orbit validation given by the ILRS community but also the ILRS community itself may also receive some feedback in return about such validation, which may be used to improve the configuration network of the SLR stations.

This section has two main objectives: (a) validate the Sentinel-3 and -6 orbit solutions created on different centres, which do not make use of SLR data for generating their solutions, and (b) prove that including an estimated range bias on each SLR station may benefit the final validation outcome.

To that end, the section will be organised as follows:

- Firstly, a Sentinel-3 and -6 combined orbit solution for each satellite will be generated by merging appropriately all Sentinel-3 and -6 orbit solutions given by different centres.
- Secondly, an estimation of the range biases of each SLR station will be performed from the combined orbit solutions previously obtained.
- Finally, the validation of all Sentinel-3 and -6 orbit solutions will be evaluated by using the estimated range biases.

3.1. CALCULATION OF THE SENTINEL-3 AND -6A COMBINED ORBIT SOLUTION

The Sentinel-3 and -6 orbit solutions are currently being computed by several centres that conform the Copernicus POD Quality Working Group (QWG), which is intended to ensure the good quality of the products generated by the CPOD Service. The centres contributing to the combined solution are: AIUB, CNES, CPOD, DLR, ESOC, GFZ, JPL, TUD, TUG and TUM.

Table 3-1 lists all the Sentinel-3 and -6 orbit solutions that will be used in the present analysis. These orbit solutions are based on very similar GNSS processing strategies, although using different processing schemes, models and software:

- The CNES orbit solution includes DORIS observations along with the GPS data.
- The CPOF is a new orbit solution generated by the CPOD Service, with have a different geopotential compared to the current operational solution. This new geopotential will substitute the current one.
- The combined orbit solution (labelled as COMB) is then obtained from a combination of all orbit solutions of the centres mentioned above. These orbit solutions are properly weighted by following an IGS-like approach used by the International GNSS Service (IGS) to finally generate the COMB orbit solution.

None of the centres uses the SLR observations in the determination process, which allow the SLR data to be used as an independent means to validate the orbital accuracy of the orbit solutions of all centres.

Table 3-1: List of the centres providing orbit solutions for the generation of the combined orbit solution (labelled as COMB) of the Sentinel-3 and -6 satellites

| Name of centre | Label/s of the orbit solution/s provided |
|--|--|
| Centre National d'Études Spatiales (CNES) | CNES |
| Copernicus Precise Orbit Determination (CPOD) Service | CPOF |
| Combined, using orbits from: AIUB, CNES, CPOD, DLR, ESOC, GFZ, JPL, TUD, TUG and TUM | COMB |

Figure 3-1 and Figure 3-3 show the orbital comparisons (3D RMS) between the CNES and CPOF orbit solutions of all centres and the final COMB orbit solution calculated from them for Sentinel-3A, Sentinel-3B and Sentinel-6A satellites, respectively. The statistical outcome of such comparisons has been gathered in Figure 3-2 and Figure 3-4 for the corresponding satellites. From the analysis of these figures, it can be said that the vast majority of the orbit solutions are close to the COMB orbit solution (between 0.5 and 1.5 cm in mean). It can be concluded that all orbit solutions are of good quality.

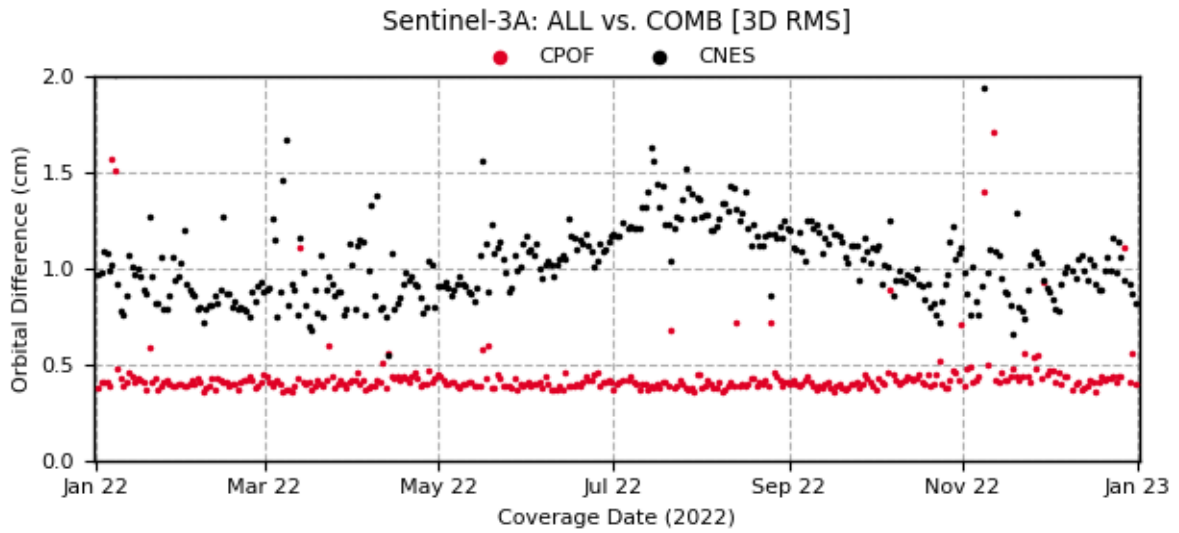


Figure 3-1: Orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-3A orbit solution and the Sentinel-3A combined orbit solution

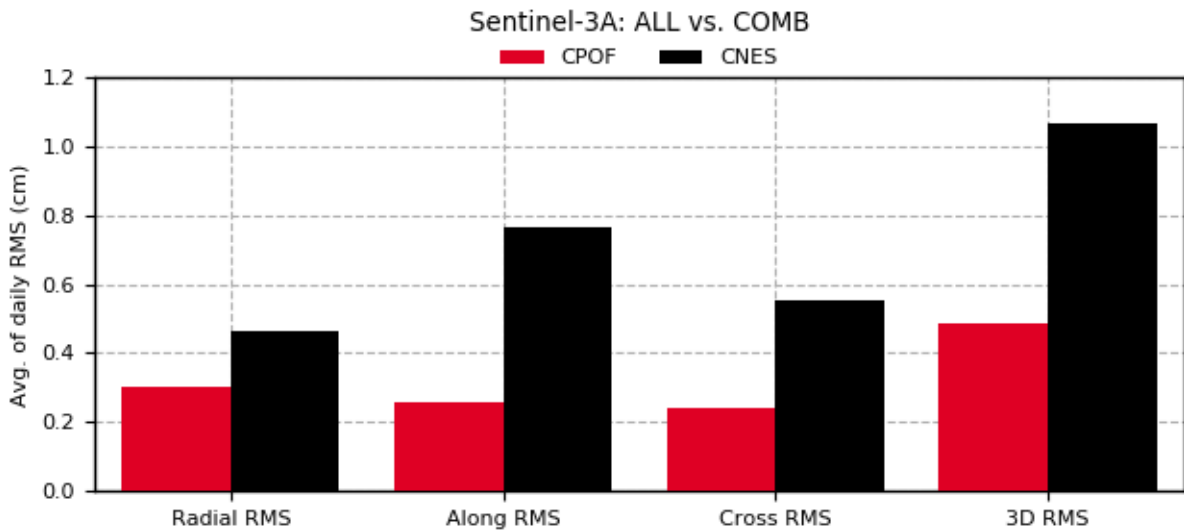


Figure 3-2: Mean and STD of the orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-3A orbit solution and the Sentinel-3A combined orbit solution

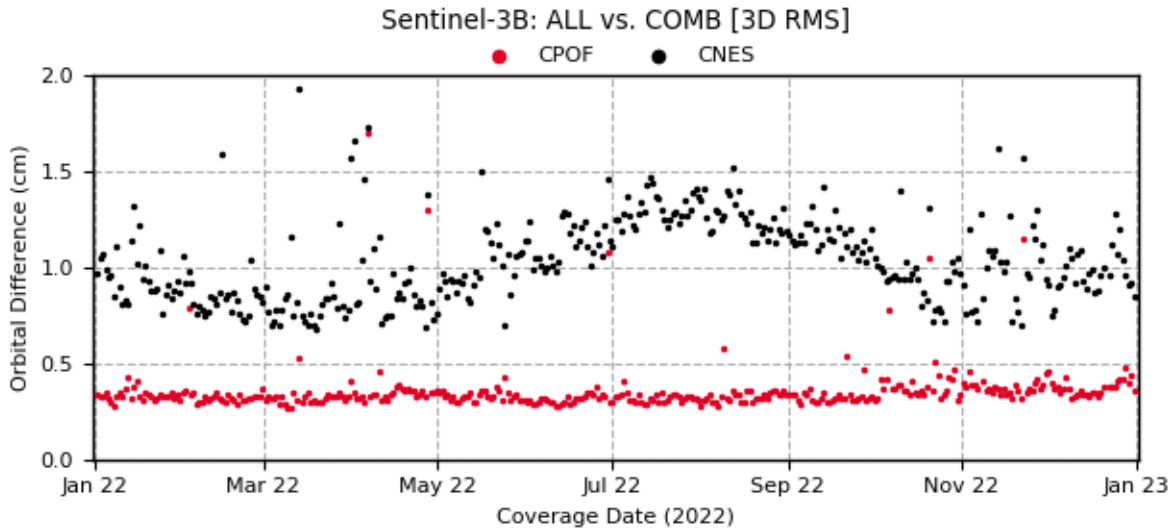


Figure 3-3: Orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-3B orbit solution and the Sentinel-3B combined orbit solution

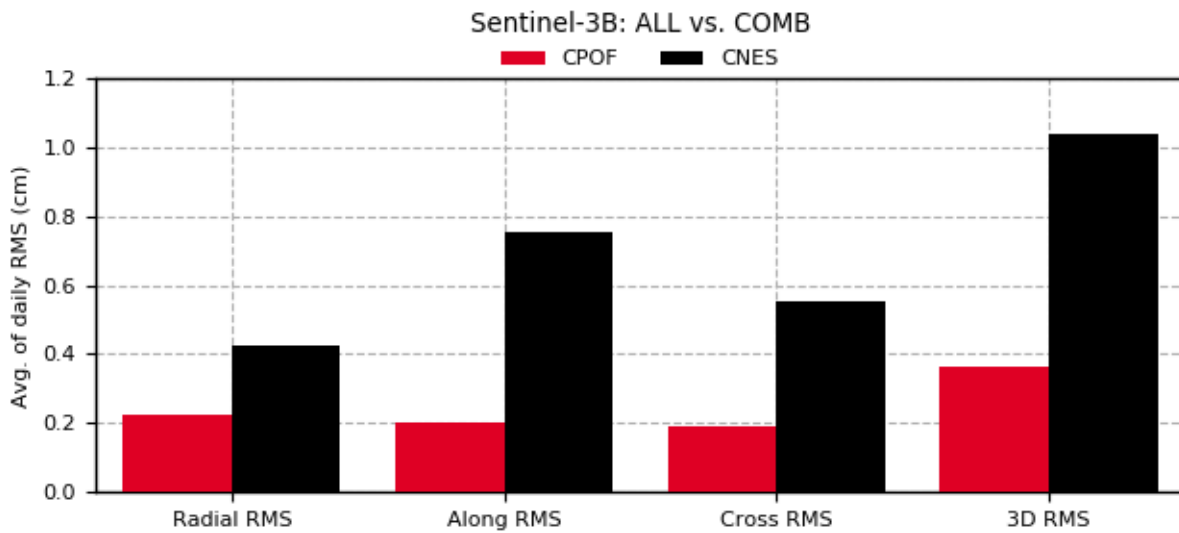


Figure 3-4: Mean and STD of the orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-3B orbit solution and the Sentinel-3B combined orbit solution

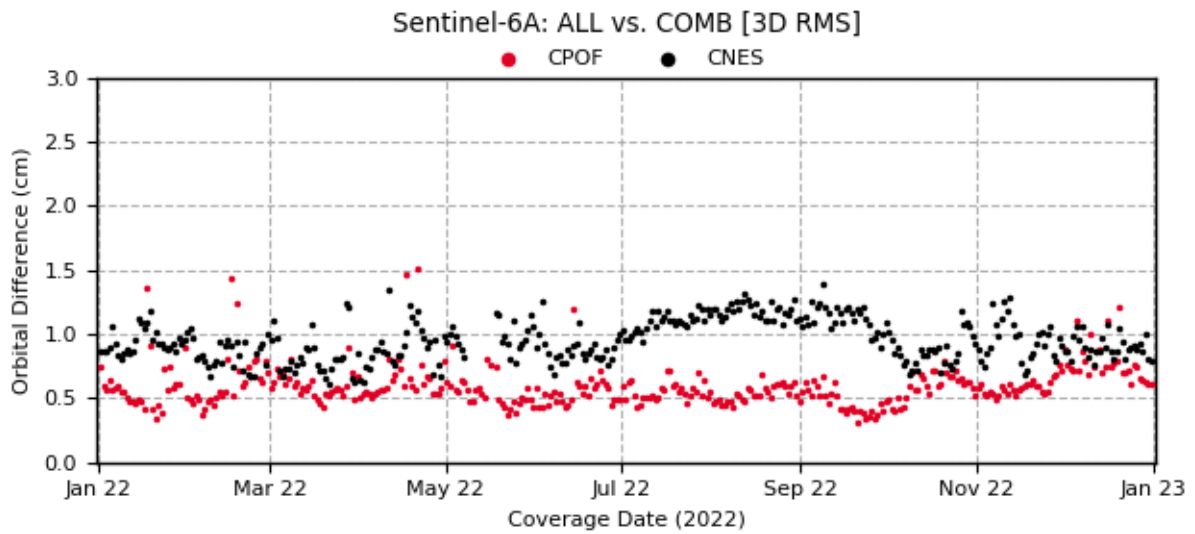


Figure 3-5: Orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-6A orbit solution and the Sentinel-6A combined orbit solution

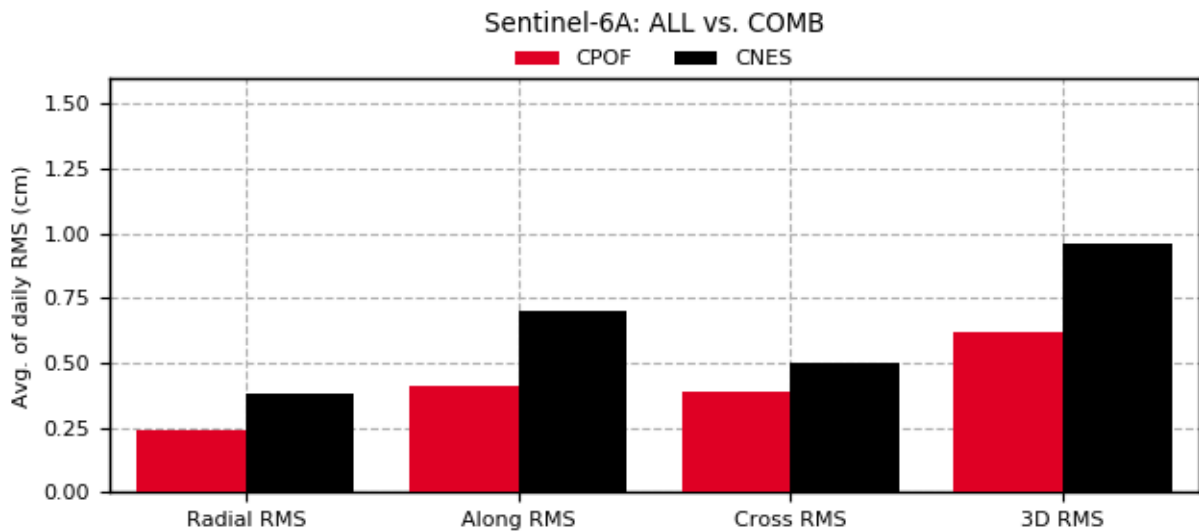


Figure 3-6: Mean and STD of the orbital comparisons [3D RMS; cm] between CPOF and CNES Sentinel-6A orbit solution and the Sentinel-6A combined orbit solution

The following tables gather the statistical outcome of the previous figures adding the results for each satellite component. Note that the Sentinel-3 and Sentinel-6A orbit solutions must present high accuracy on the radial component as the altimetry applications demand it.

Table 3-2: Summary of the mean, and STD values per satellite component of the orbital comparisons between CPOF and CNES Sentinel-3A orbit solution and the Sentinel-3A combined orbit solution during 2022

| Orbit solution | Sentinel-3A [cm] | | | | | | | |
|----------------|------------------|------|-----------------|------|-----------------|------|--------|------|
| | Radial RMS | | Along-track RMS | | Cross-track RMS | | 3D RMS | |
| | Mean | STD | Mean | STD | Mean | STD | Mean | STD |
| CPOF | 0.30 | 0.24 | 0.26 | 0.56 | 0.24 | 0.11 | 0.49 | 0.60 |
| CNES | 0.47 | 0.23 | 0.77 | 0.46 | 0.55 | 0.13 | 1.07 | 0.51 |

Table 3-3: Summary of the mean, and STD values per satellite component of the orbital comparisons between CPOF and CNES Sentinel-3B orbit solution and the Sentinel-3B combined orbit solution during 2022

| Orbit solution | Sentinel-3B [cm] | | | | | | | |
|----------------|------------------|------|-----------------|------|-----------------|------|--------|------|
| | Radial RMS | | Along-track RMS | | Cross-track RMS | | 3D RMS | |
| | Mean | STD | Mean | STD | Mean | STD | Mean | STD |
| CPOF | 0.22 | 0.05 | 0.20 | 0.17 | 0.19 | 0.08 | 0.36 | 0.18 |
| CNES | 0.43 | 0.10 | 0.75 | 0.22 | 0.55 | 0.08 | 1.04 | 0.21 |

Table 3-4: Summary of the mean, and STD values per satellite component of the orbital comparisons between CPOF and CNES Sentinel-6A orbit solution and the Sentinel-6A combined orbit solution during 2022

| Orbit solution | Sentinel-6A [cm] | | | | | | | |
|----------------|------------------|------|-----------------|------|-----------------|------|--------|------|
| | Radial RMS | | Along-track RMS | | Cross-track RMS | | 3D RMS | |
| | Mean | STD | Mean | STD | Mean | STD | Mean | STD |
| CPOF | 0.24 | 0.13 | 0.41 | 0.32 | 0.39 | 0.20 | 0.62 | 0.39 |
| CNES | 0.38 | 0.08 | 0.70 | 0.17 | 0.50 | 0.13 | 0.96 | 0.16 |

Since all orbit solutions are computed using the same set of observations from GNSS, an independent technique such as the SLR is needed to guarantee that the previous orbit solutions have no systematic biases affecting them all equally. An analysis of the SLR residuals can consequently be used to identify these possible biases. Keep in mind that the SLR residuals are nothing more than the differences between the SLR observations that would be obtained for a specific orbit solution and those SLR observations provided by the SLR stations themselves. The following figures show the amount of the SLR observations delivered by the SLR stations during the time period evaluated.

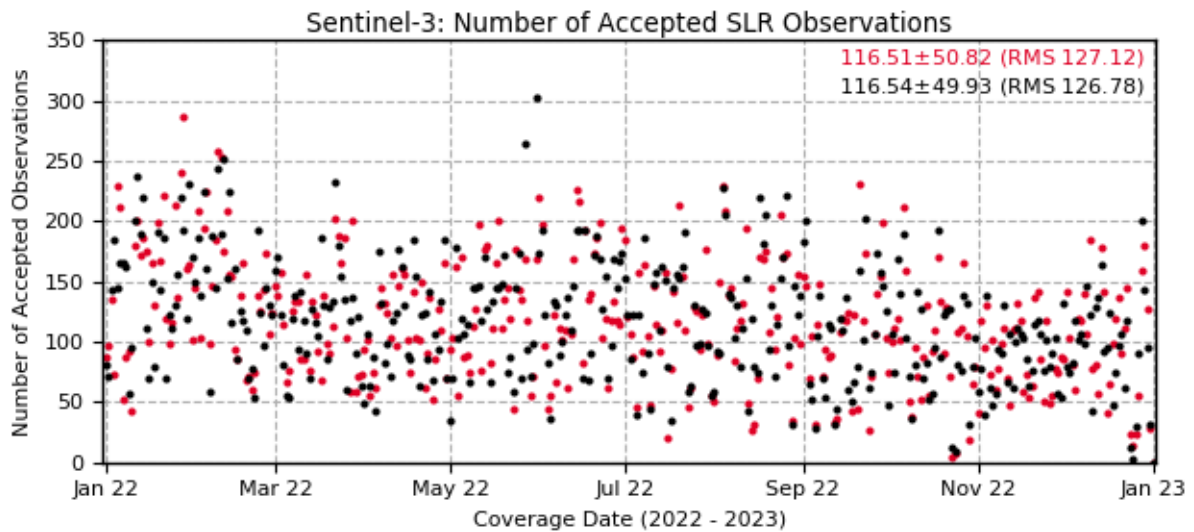


Figure 3-7: Daily total number of the accepted SLR observations of all SLR stations tracking Sentinel-3A and Sentinel-3B satellites in 2022

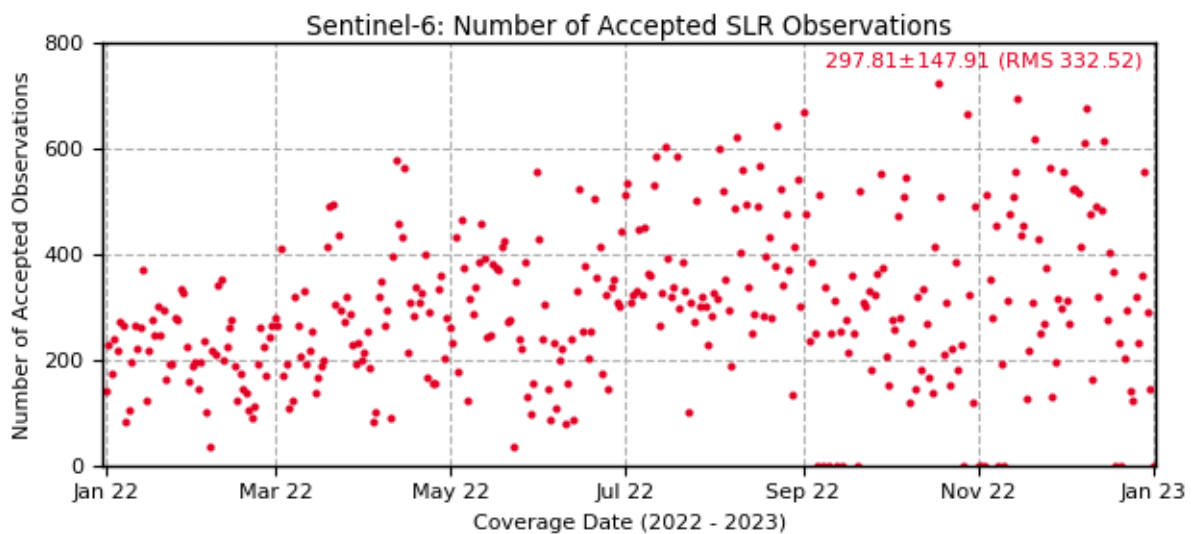






Figure 3-8: Daily total number of the accepted SLR observations of all SLR stations tracking Sentinel-6A satellite in 2022

Prior to the calculation of the SLR residuals, it has been deemed worth to estimate a range bias for each SLR station in order to improve the statistical outcome on the residuals.


3.2. ESTIMATION OF THE RANGE BIASES FOR ALL SLR STATIONS

A range bias per station is estimated by fixing the Sentinel-3 and -6A combined orbit solution and estimating the range bias of the SLR observations over one month. Note that some eccentricities have been applied to the coordinates of the stations (see Section 6).


The following figure includes the plots of the temporal evolution of these estimated range biases for each SLR station assessed and discerning between Sentinel-3A, Sentinel-3B and Sentinel-6A.

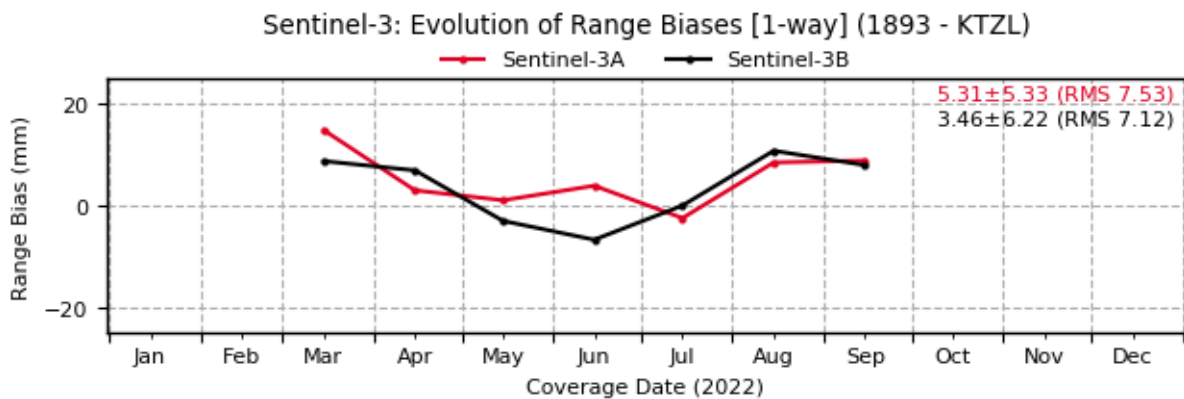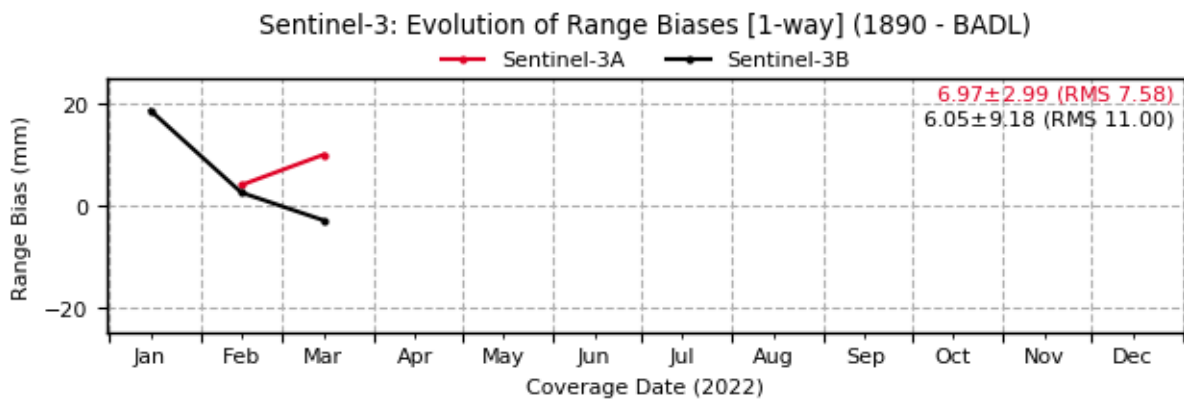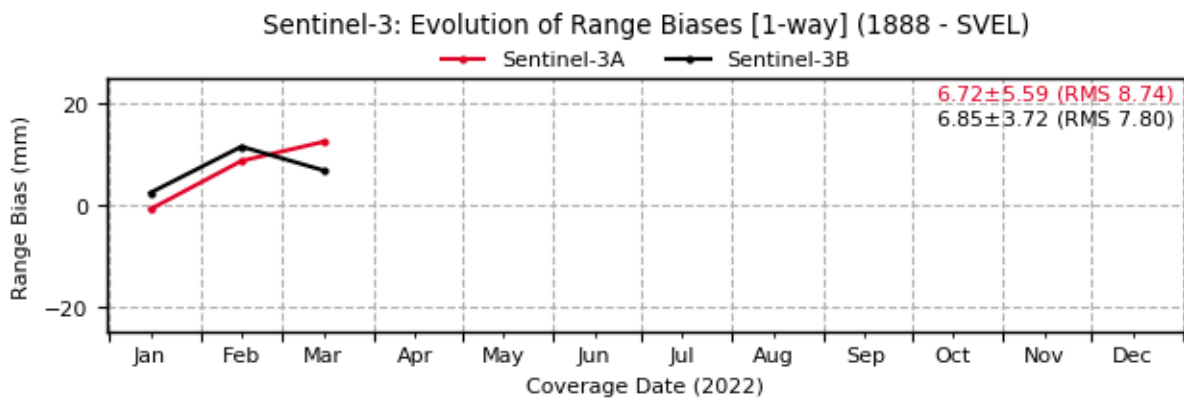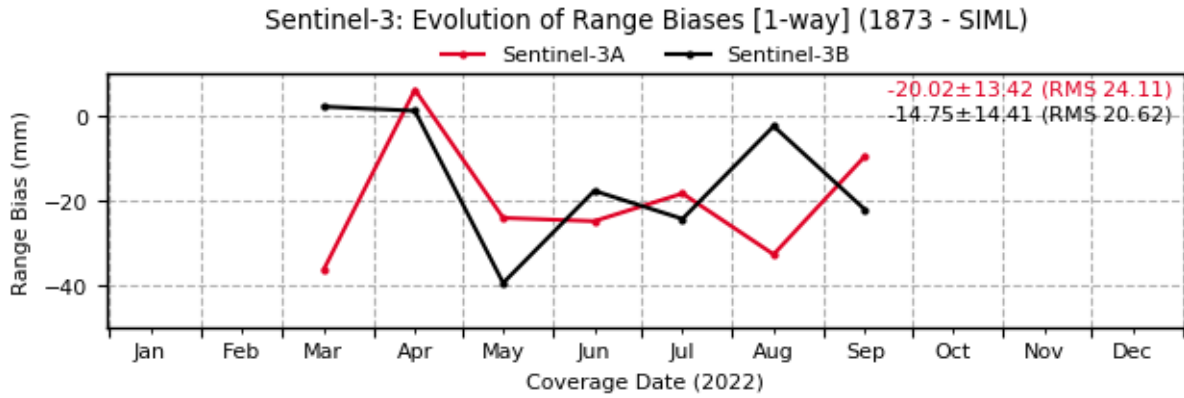


Sentinel-3: Evolution of Range Biases [1-way] (7090 - YARL)

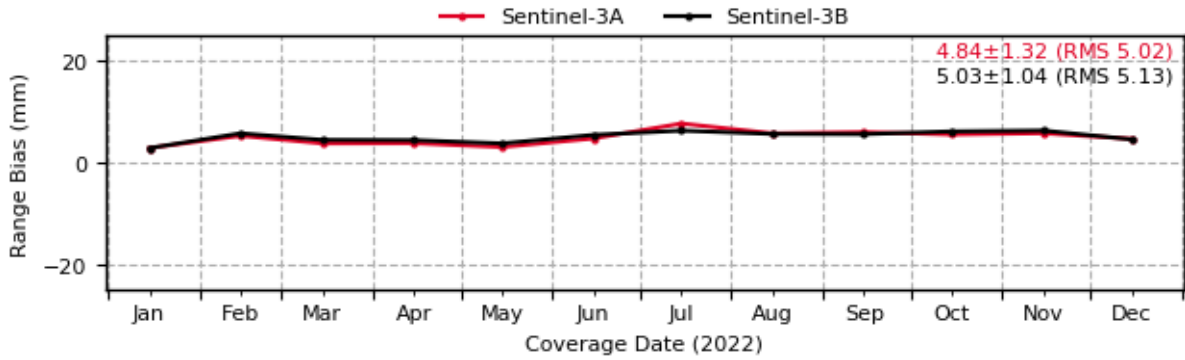


Sentinel-3: Evolution of Range Biases [1-way] (7105 - GODL)

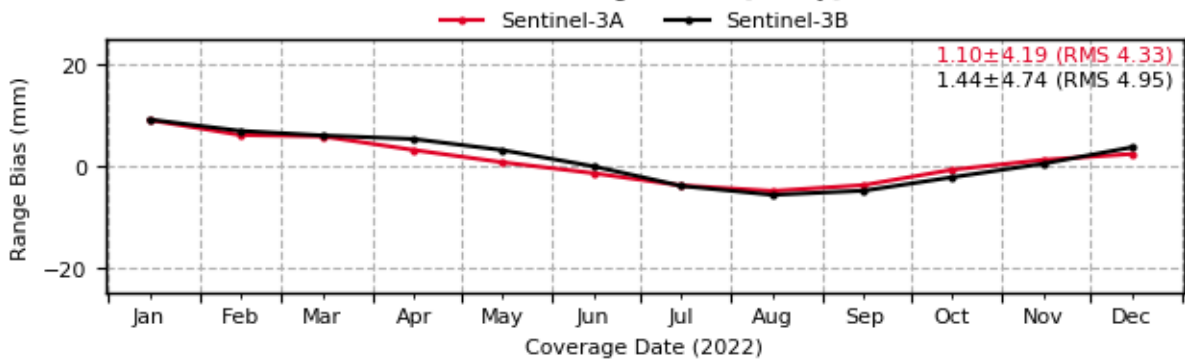


Sentinel-3: Evolution of Range Biases [1-way] (7110 - MONL)

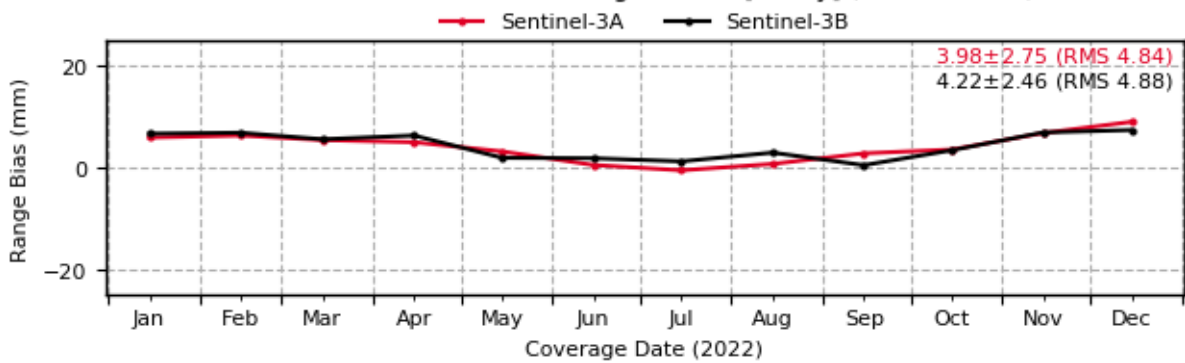


Sentinel-3: Evolution of Range Biases [1-way] (7119 - HA4T)

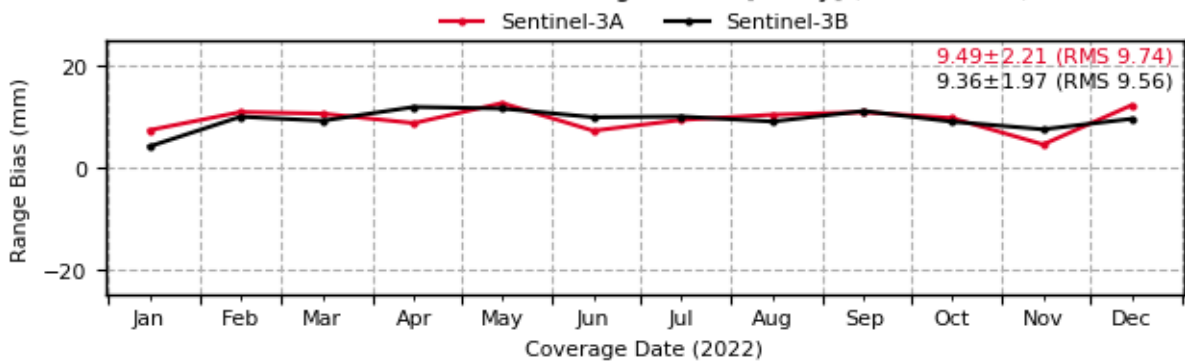


Sentinel-3: Evolution of Range Biases [1-way] (7124 - THTL)

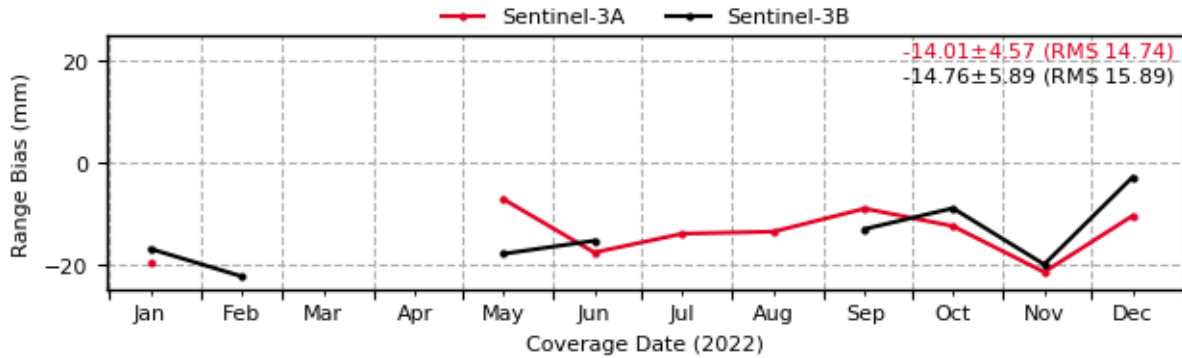


Sentinel-3: Evolution of Range Biases [1-way] (7403 - AREL)

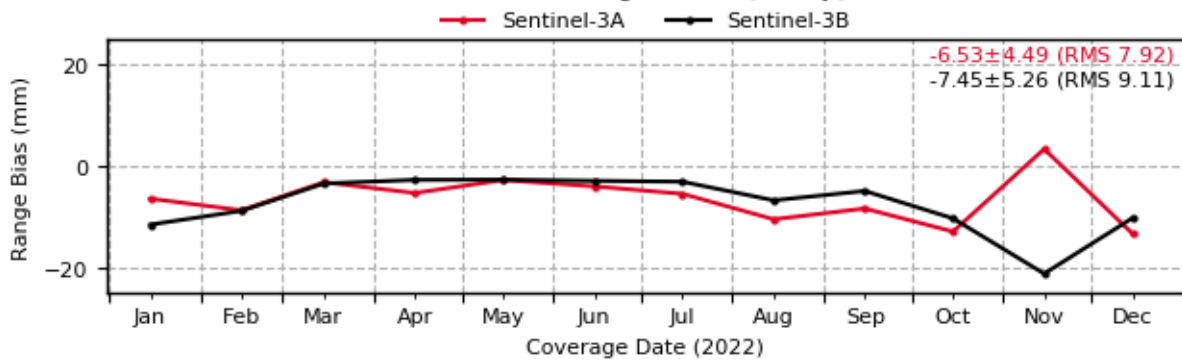


Sentinel-3: Evolution of Range Biases [1-way] (7501 - HARL)

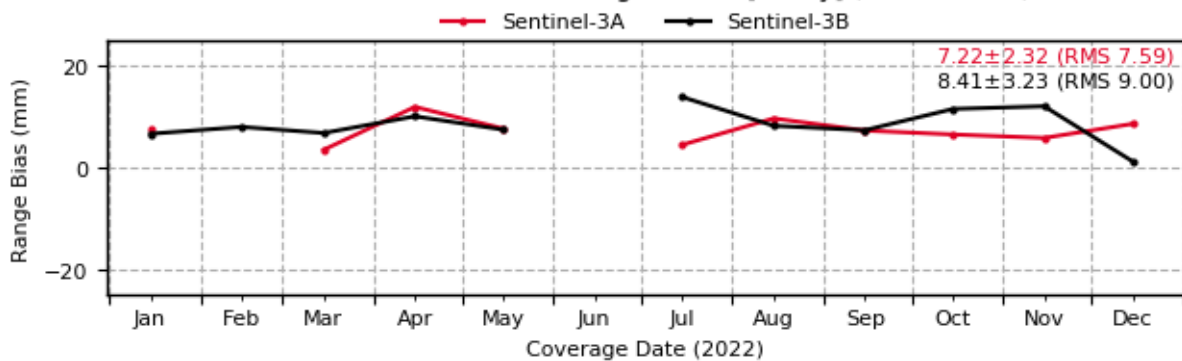


Sentinel-3: Evolution of Range Biases [1-way] (7810 - ZIML)

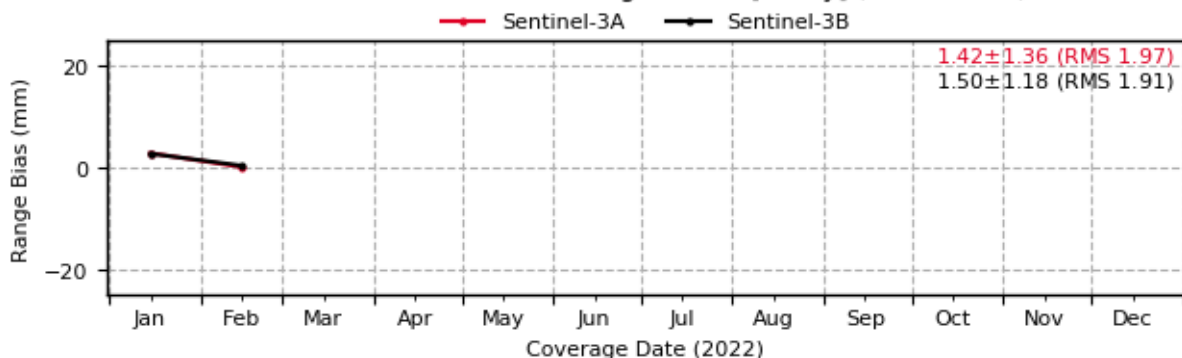


Sentinel-3: Evolution of Range Biases [1-way] (7811 - BORL)

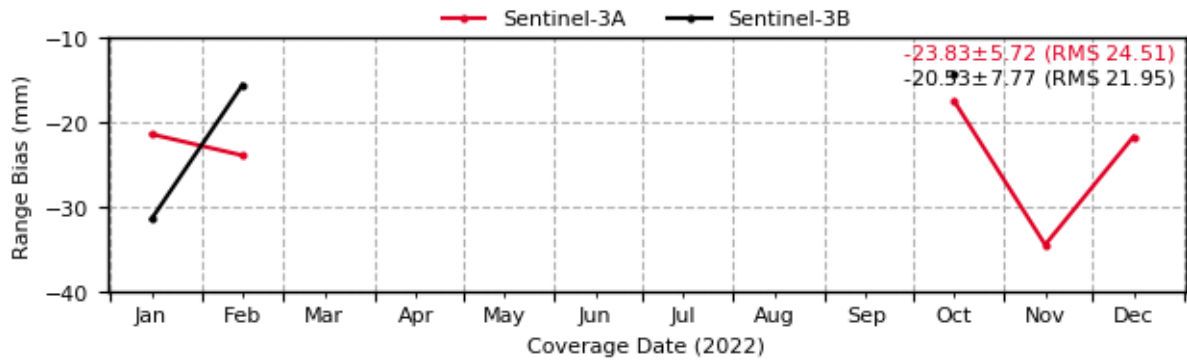


Sentinel-3: Evolution of Range Biases [1-way] (7824 - SFEL)

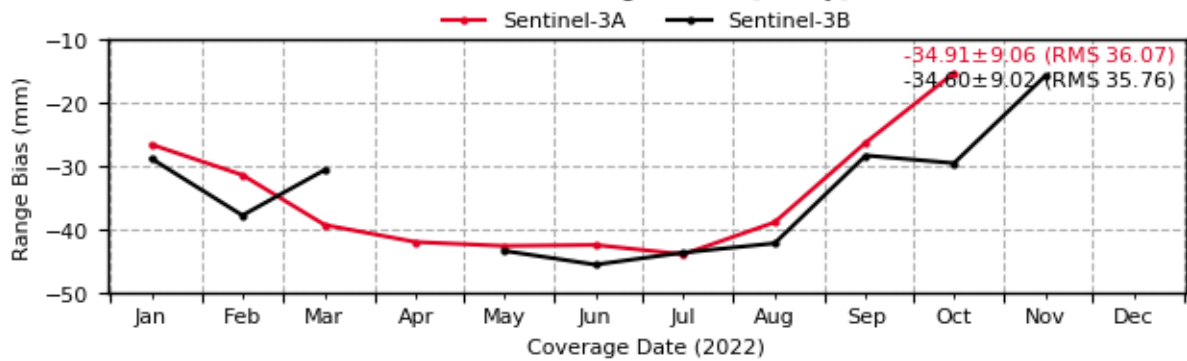

Sentinel-3: Evolution of Range Biases [1-way] (7825 - STL3)

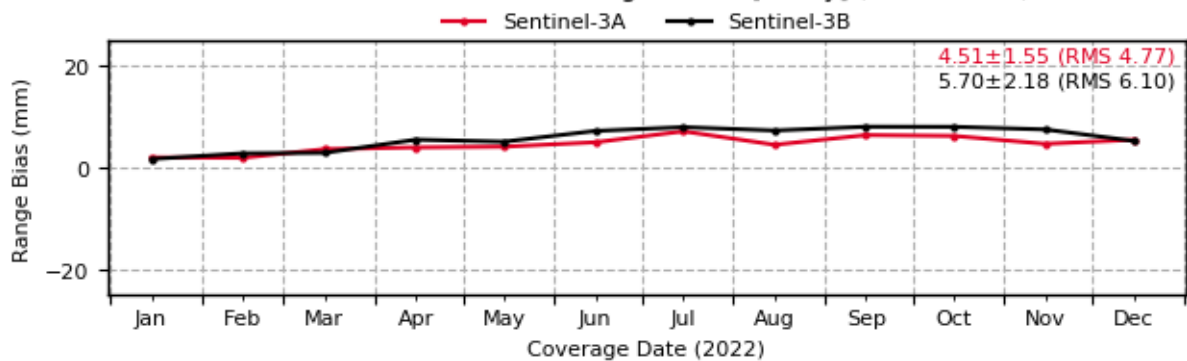

Sentinel-3: Evolution of Range Biases [1-way] (7839 - GRZL)

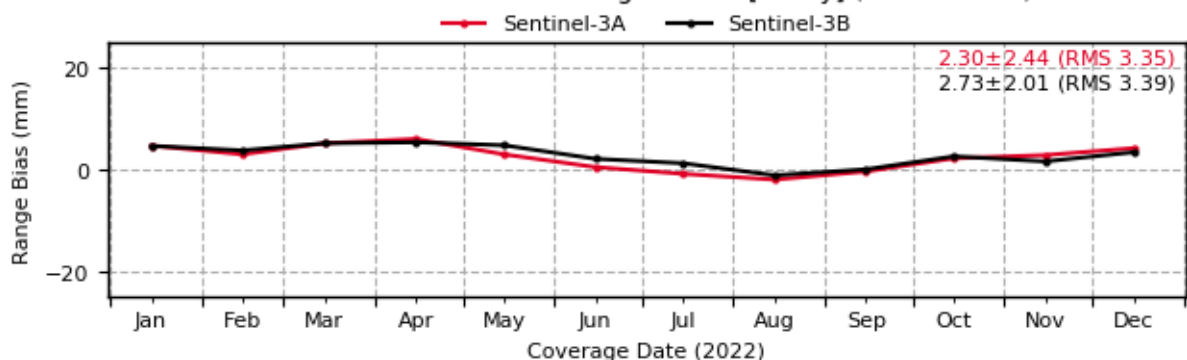



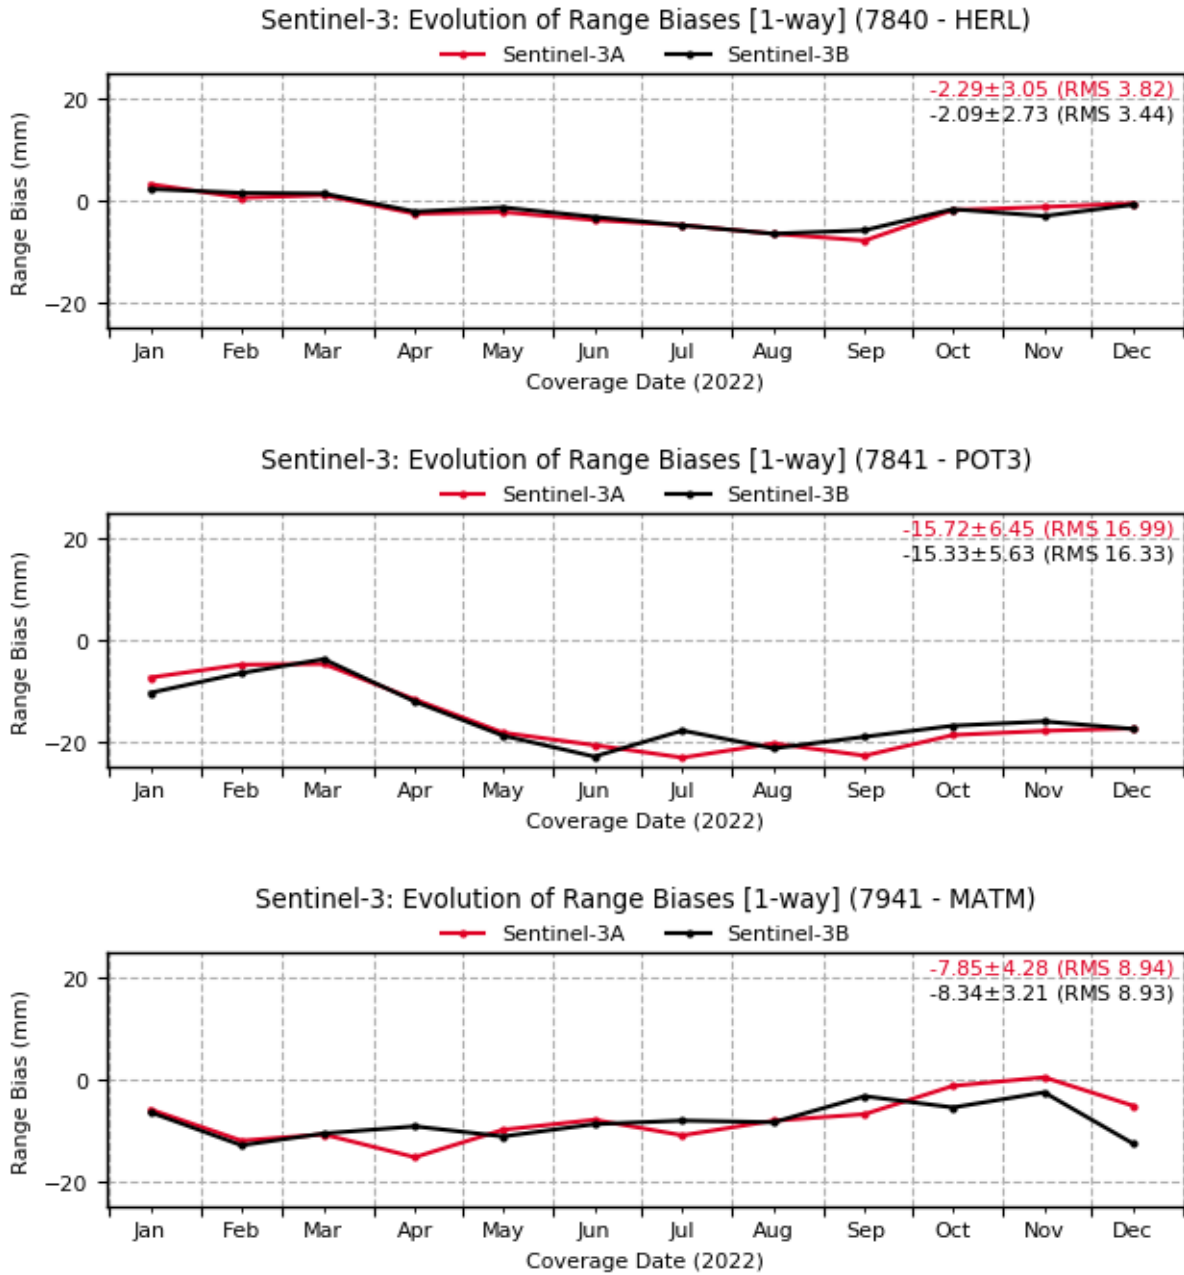


Figure 3-9: Evolution of the range biases [1-way; mm] calculated for each SLR station tracking Sentinel-3A and Sentinel-3B satellites in 2022


Sentinel-6: Evolution of Range Biases [1-way] (1824 - GLSL)

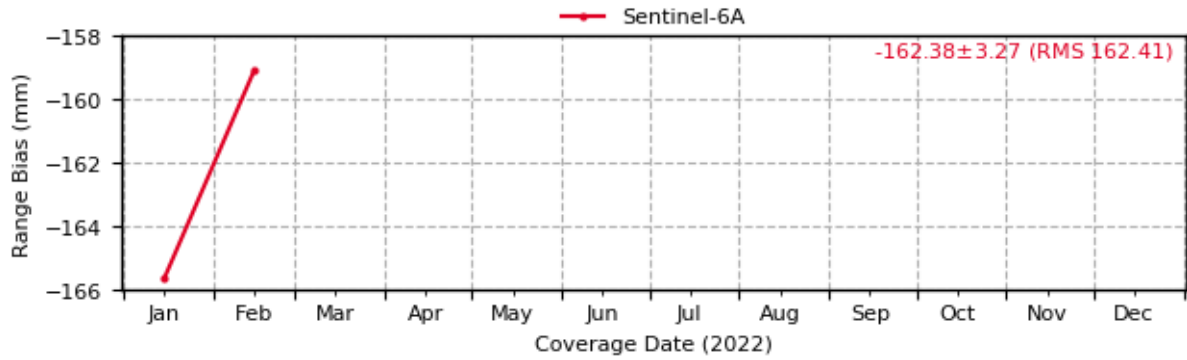


Sentinel-6: Evolution of Range Biases [1-way] (1873 - SIML)

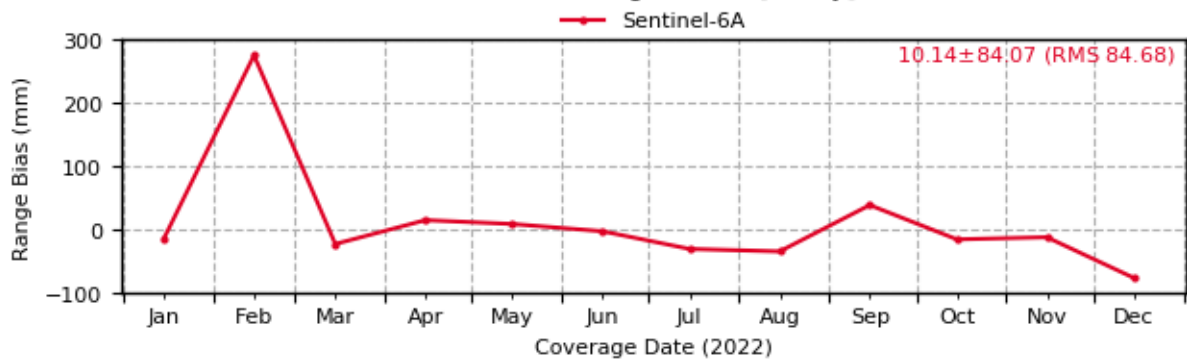


Sentinel-6: Evolution of Range Biases [1-way] (1893 - KTZL)

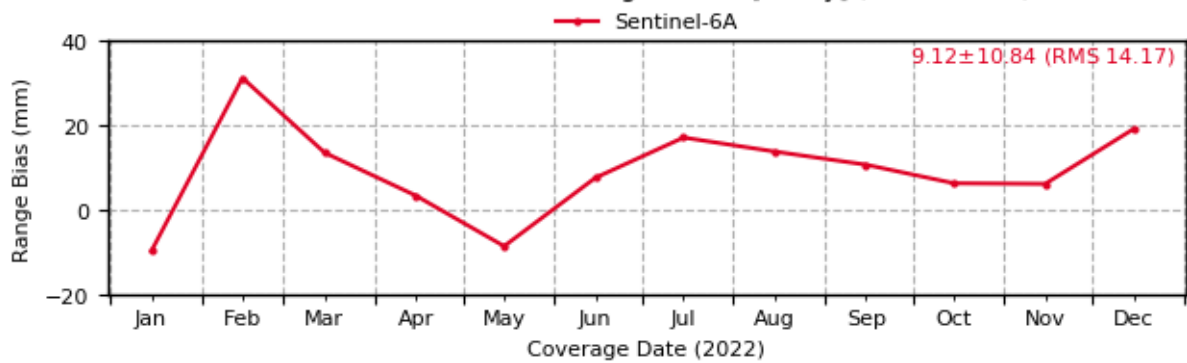


Sentinel-6: Evolution of Range Biases [1-way] (7090 - YARL)

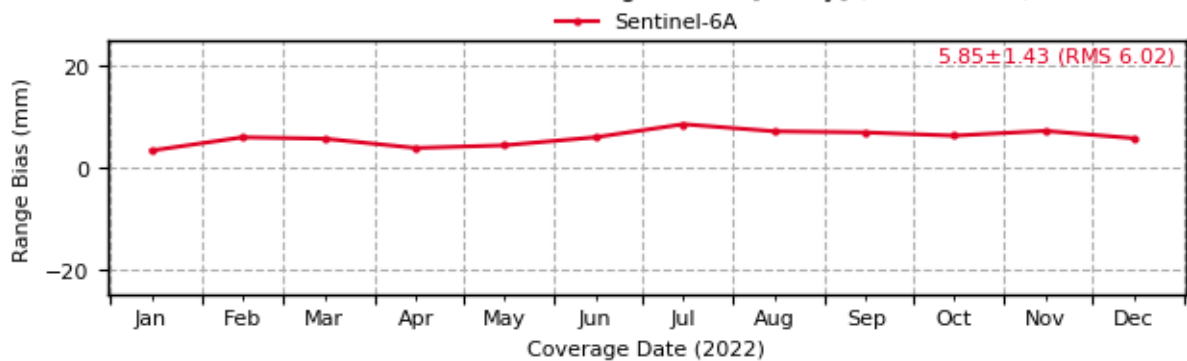


Sentinel-6: Evolution of Range Biases [1-way] (7105 - GODL)

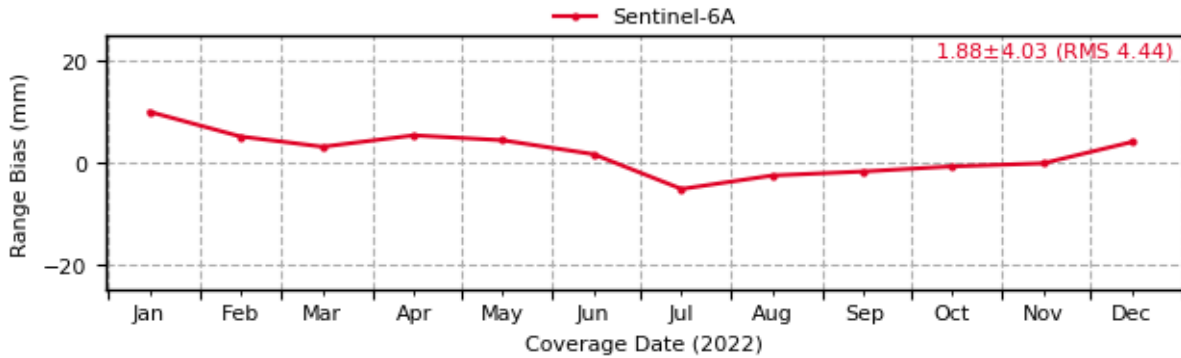


Sentinel-6: Evolution of Range Biases [1-way] (7110 - MONL)

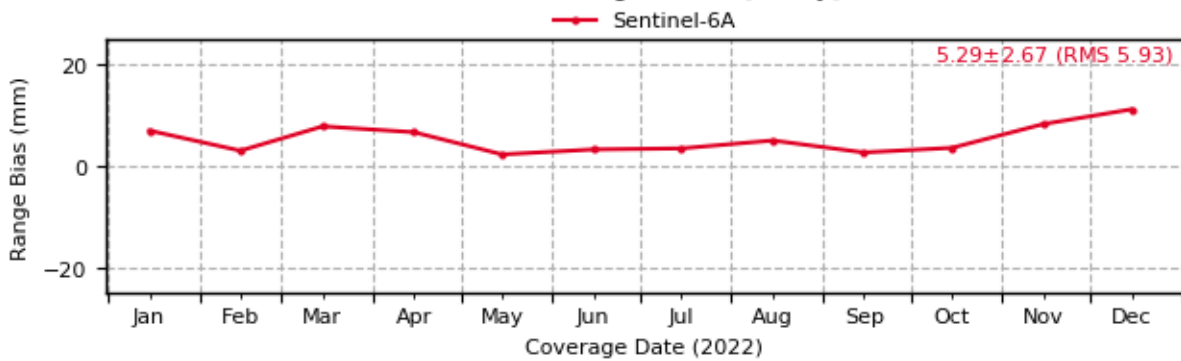


Sentinel-6: Evolution of Range Biases [1-way] (7119 - HA4T)

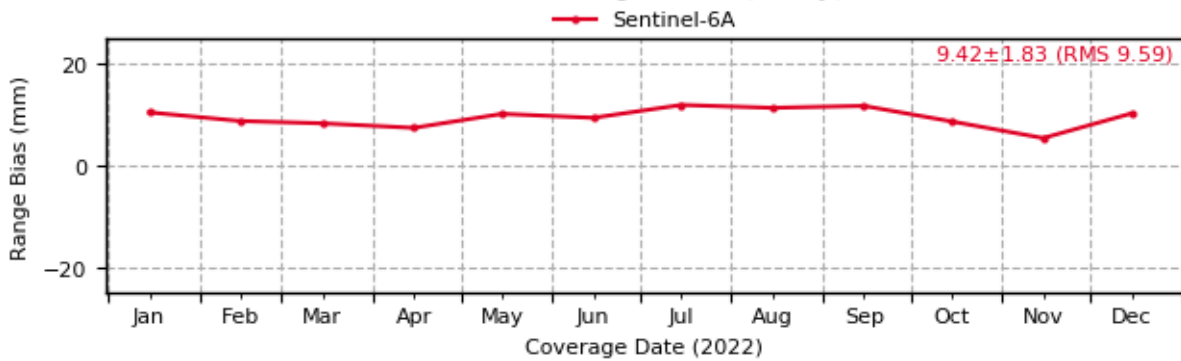


Sentinel-6: Evolution of Range Biases [1-way] (7124 - THTL)

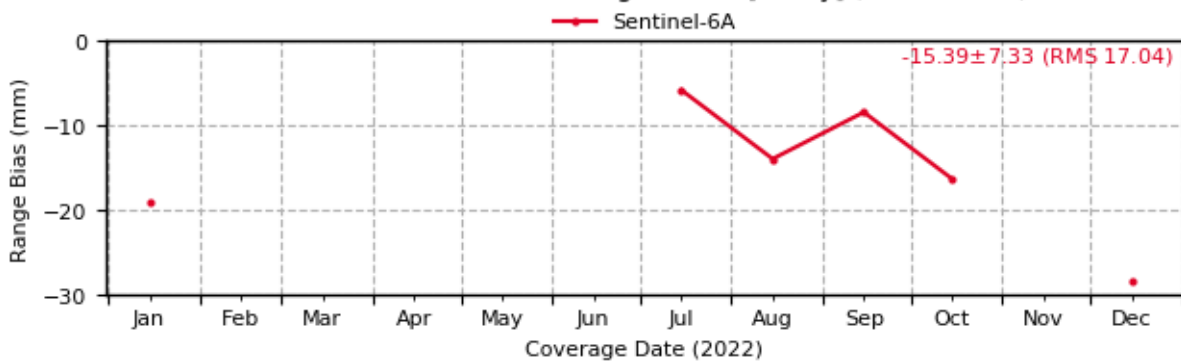


Sentinel-6: Evolution of Range Biases [1-way] (7237 - CHAL)

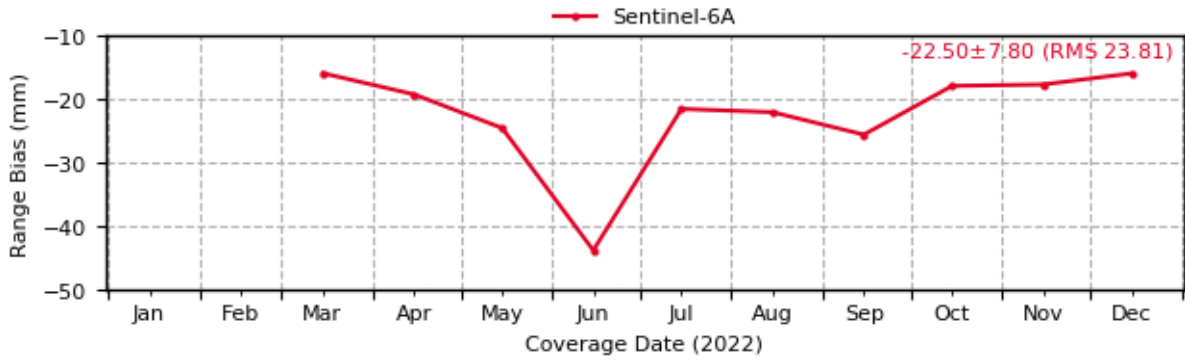


Sentinel-6: Evolution of Range Biases [1-way] (7249 - BEIL)

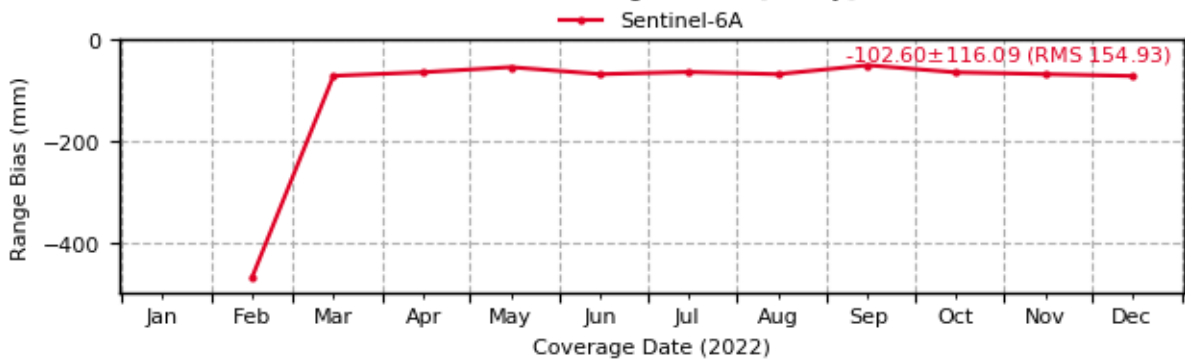


Sentinel-6: Evolution of Range Biases [1-way] (7396 - JFNL)

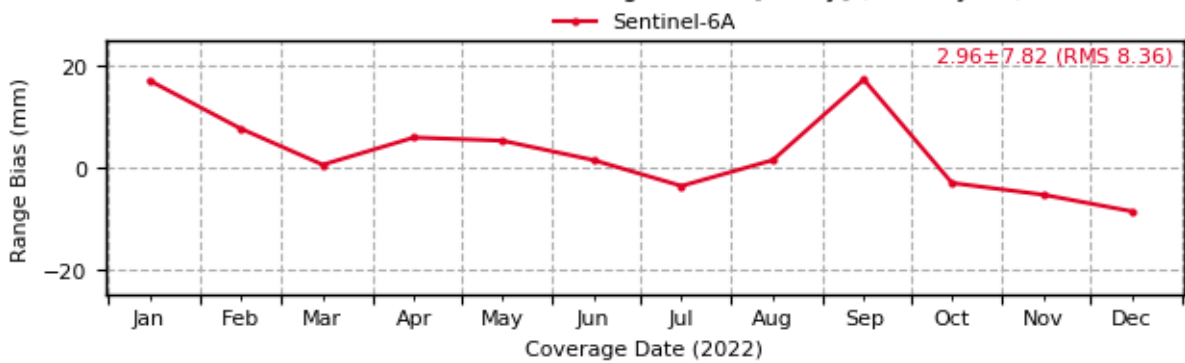


Sentinel-6: Evolution of Range Biases [1-way] (7403 - AREL)

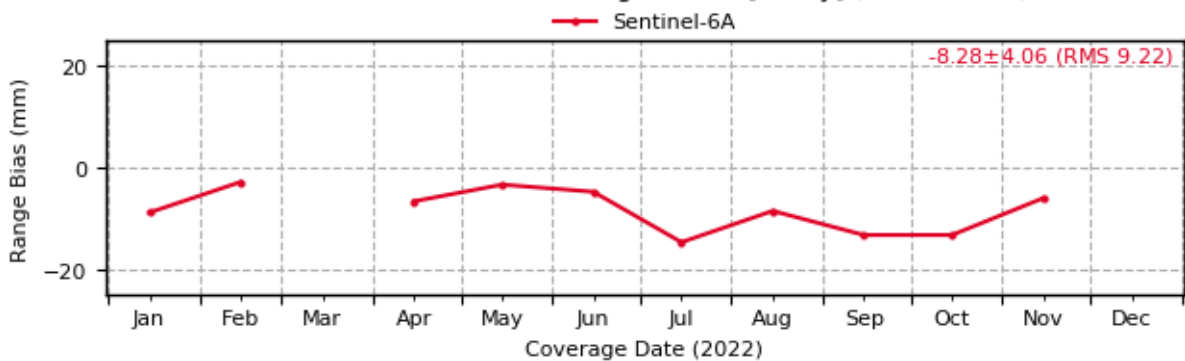


Sentinel-6: Evolution of Range Biases [1-way] (7501 - HARL)

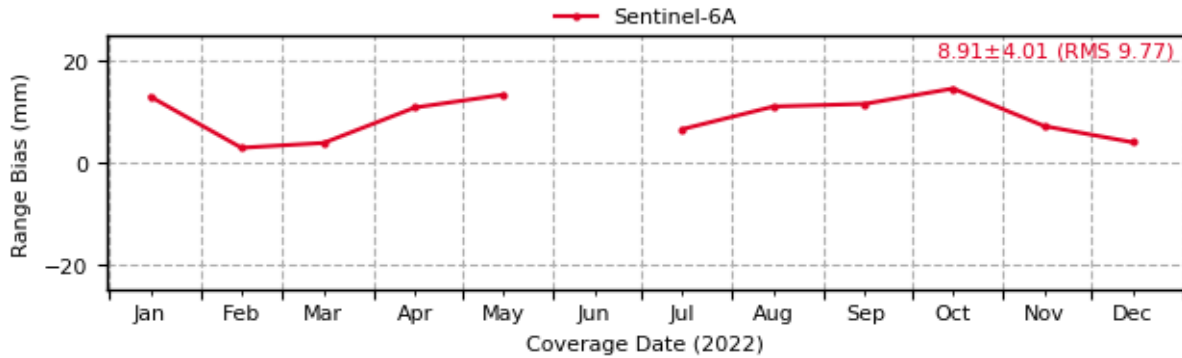


Sentinel-6: Evolution of Range Biases [1-way] (7701 - IZ1L)

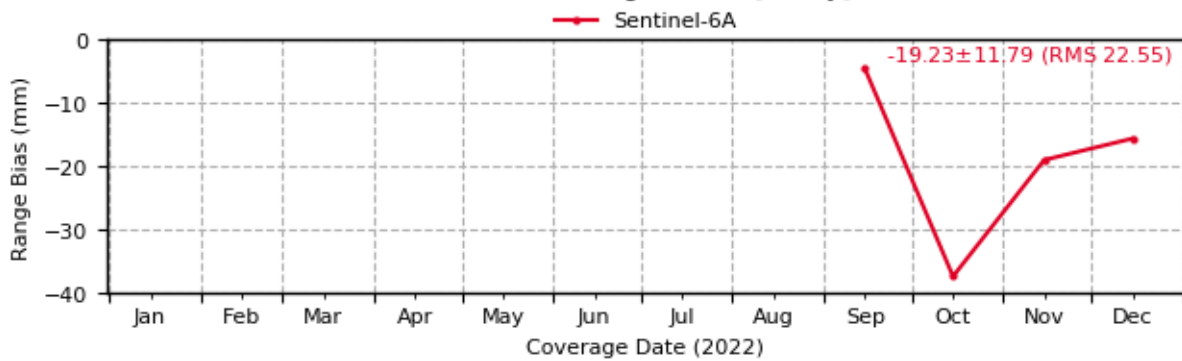


Sentinel-6: Evolution of Range Biases [1-way] (7810 - ZIML)

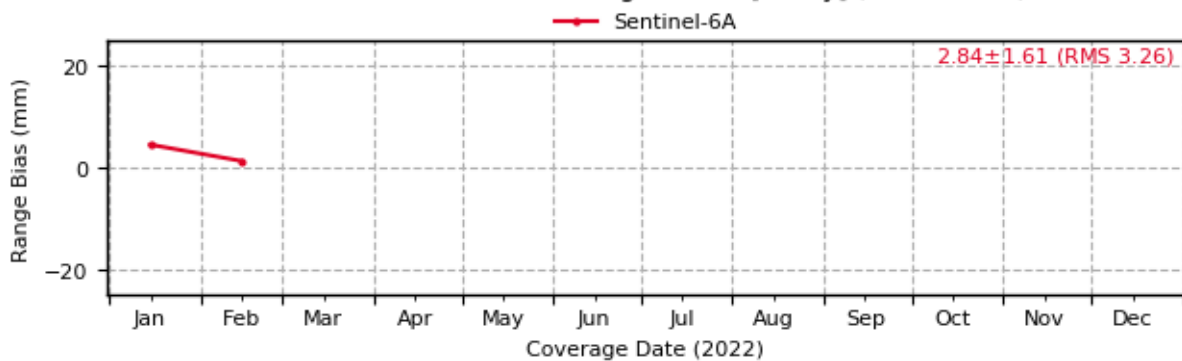


Sentinel-6: Evolution of Range Biases [1-way] (7811 - BORL)

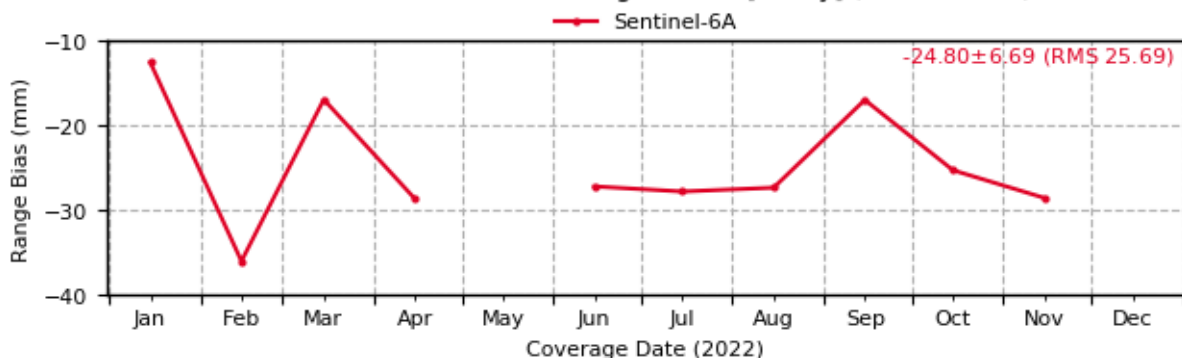


Sentinel-6: Evolution of Range Biases [1-way] (7819 - KUN2)

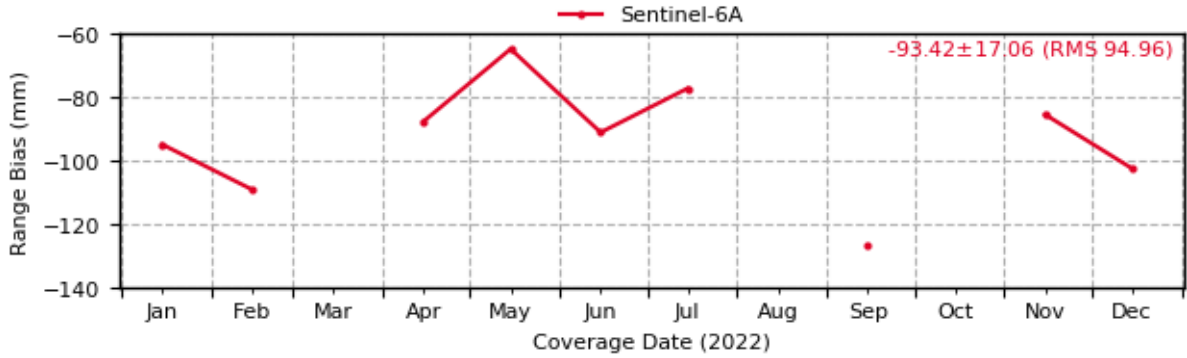


Sentinel-6: Evolution of Range Biases [1-way] (7821 - SHA2)

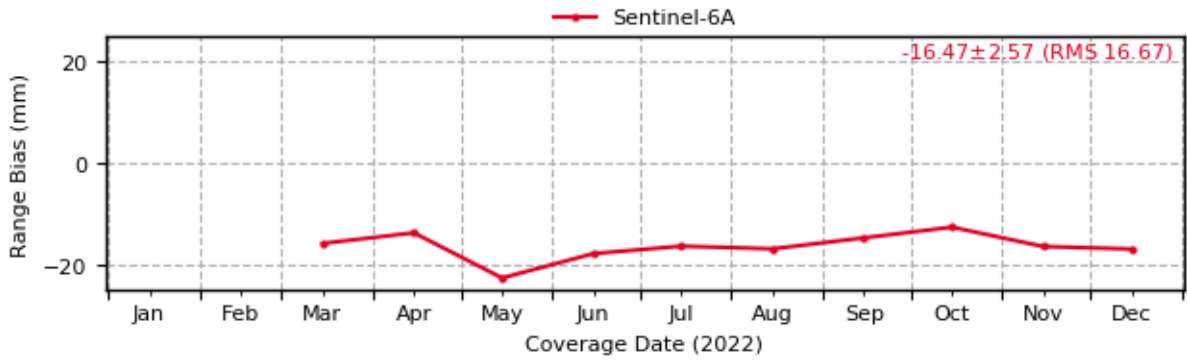


Sentinel-6: Evolution of Range Biases [1-way] (7824 - SFEL)

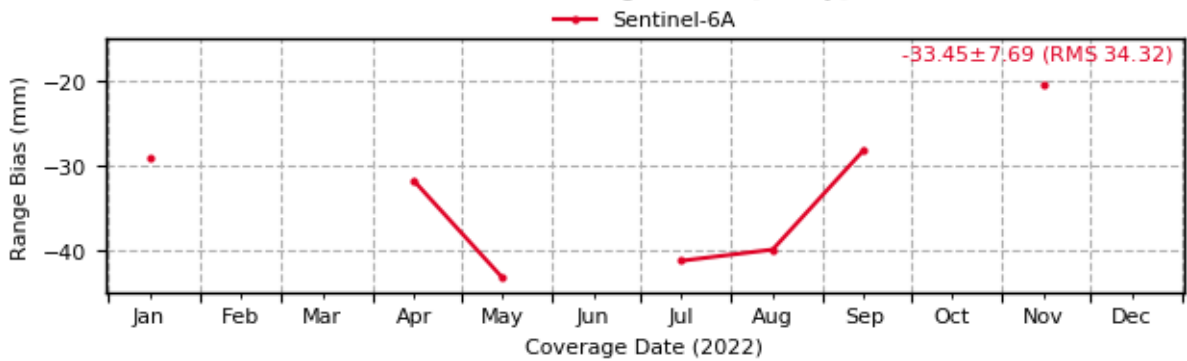


Sentinel-6: Evolution of Range Biases [1-way] (7825 - STL3)

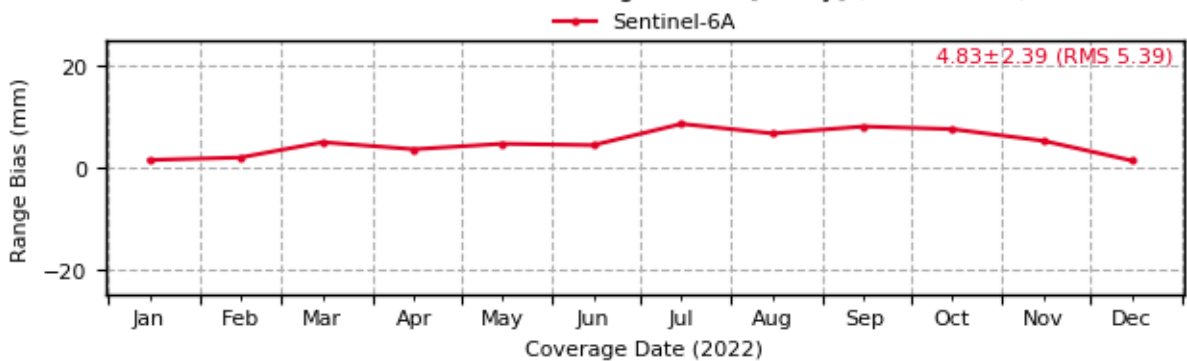


Sentinel-6: Evolution of Range Biases [1-way] (7827 - SOSW)

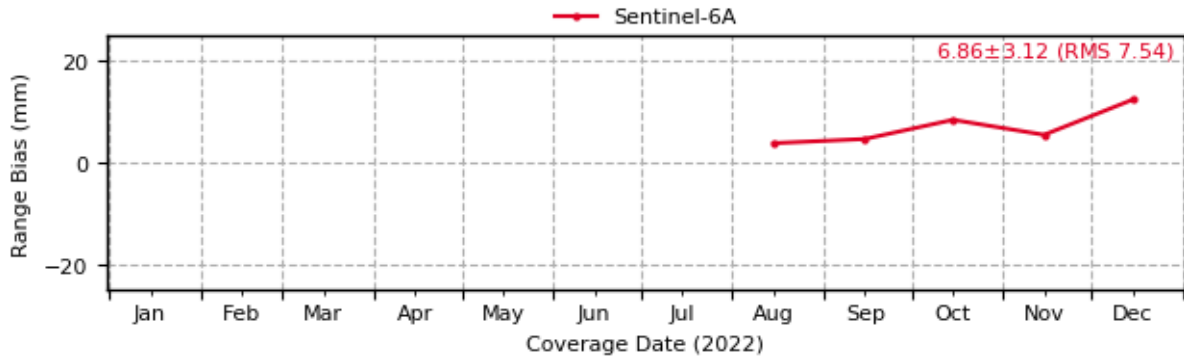


Sentinel-6: Evolution of Range Biases [1-way] (7838 - SISL)

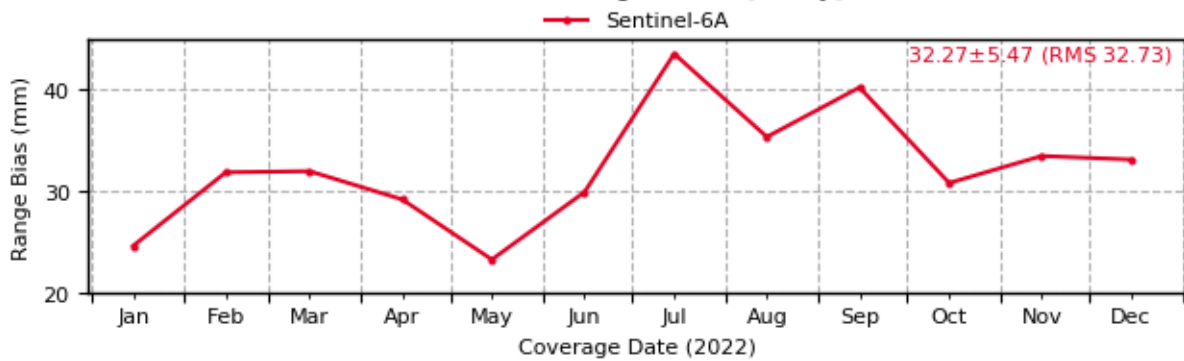

Sentinel-6: Evolution of Range Biases [1-way] (7839 - GRZL)

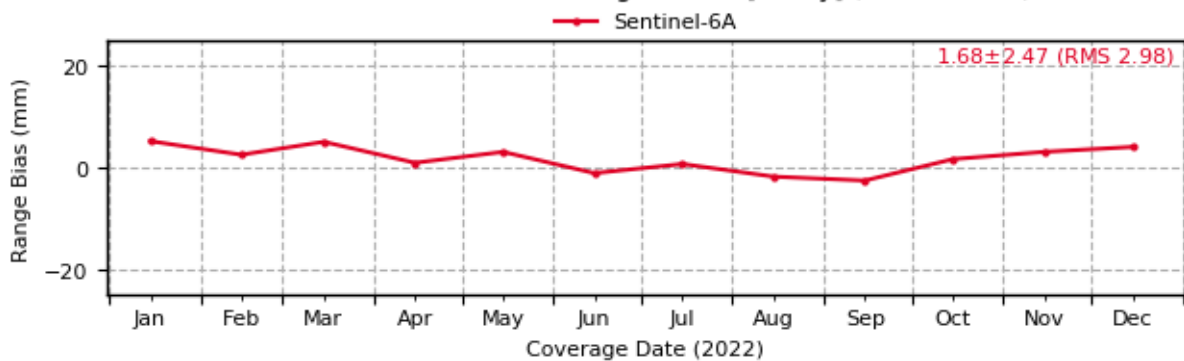

Sentinel-6: Evolution of Range Biases [1-way] (7840 - HERL)

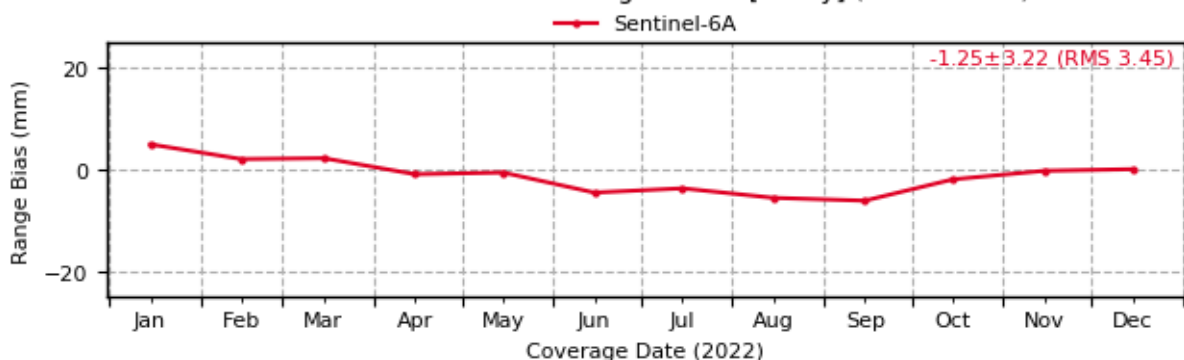

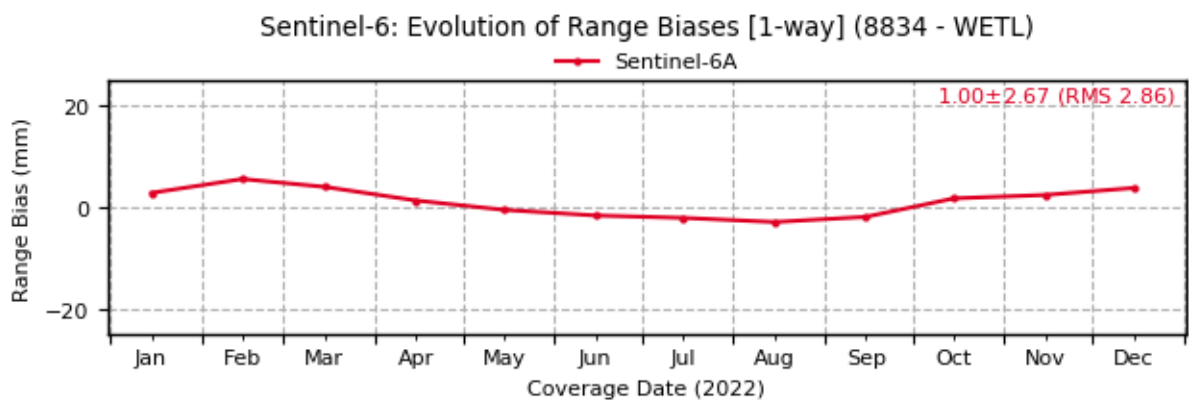
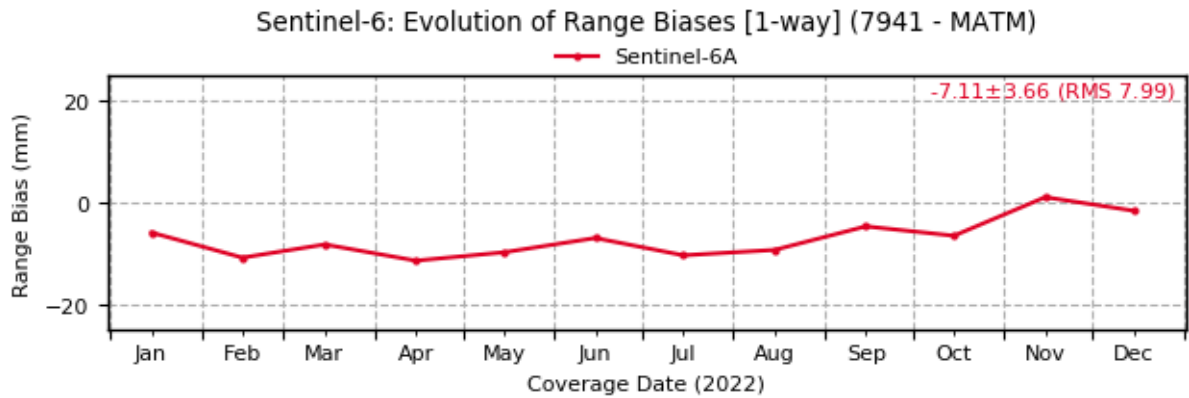
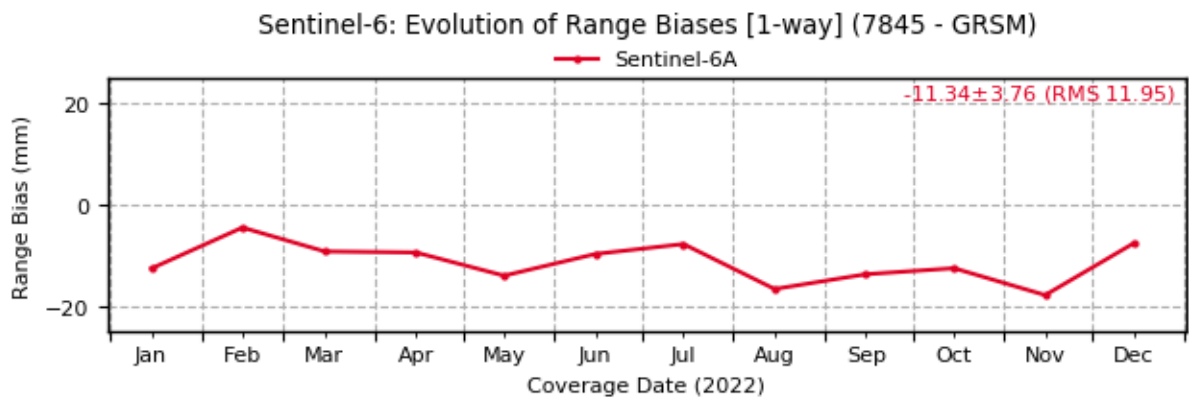
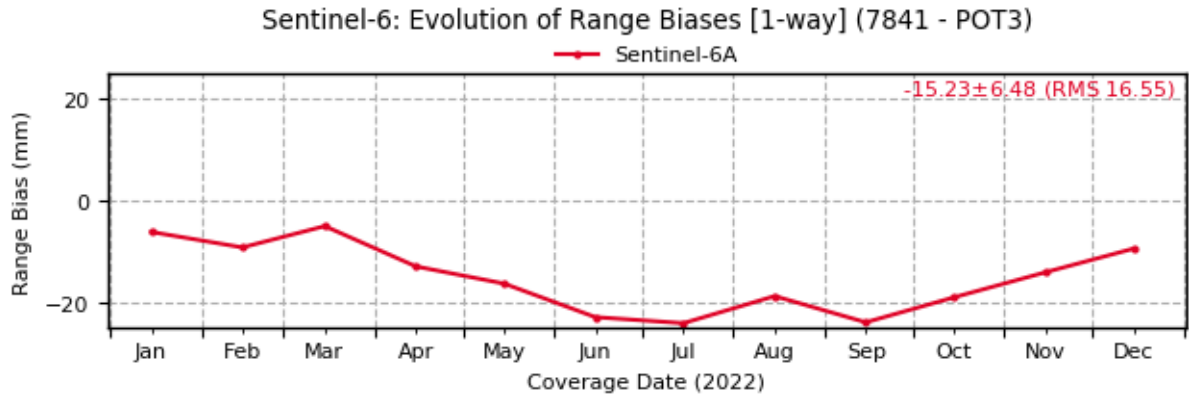


Figure 3-10: Evolution of the range biases [1-way; mm] calculated for each SLR station tracking Sentinel-6A satellite in 2022

The outcome of these figures is summarised in the following two figures, where the mean, standard deviation and root mean square statistics of the range biases estimated above are shown. As seen in the figures, the vast majority of the SLR stations obtains statistical figures below 1.5 cm (in absolute value). There are only three SLR stations that present unusual values.

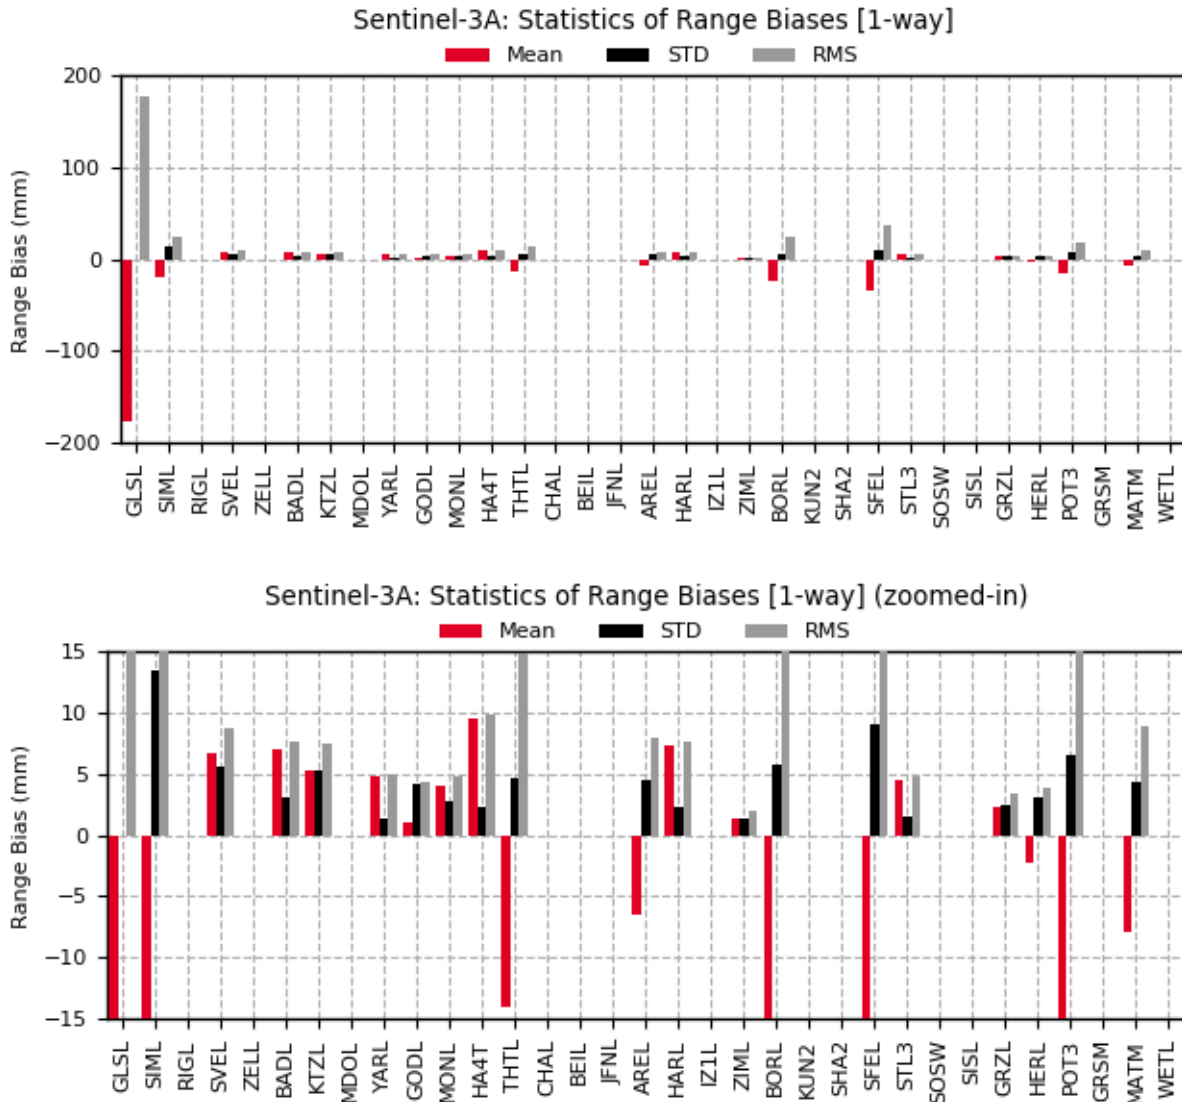


Figure 3-11: Mean, STD and RMS of the Sentinel-3A range biases [1-way; mm] of each SLR station (the figure below is a zoomed-in of the figure above)

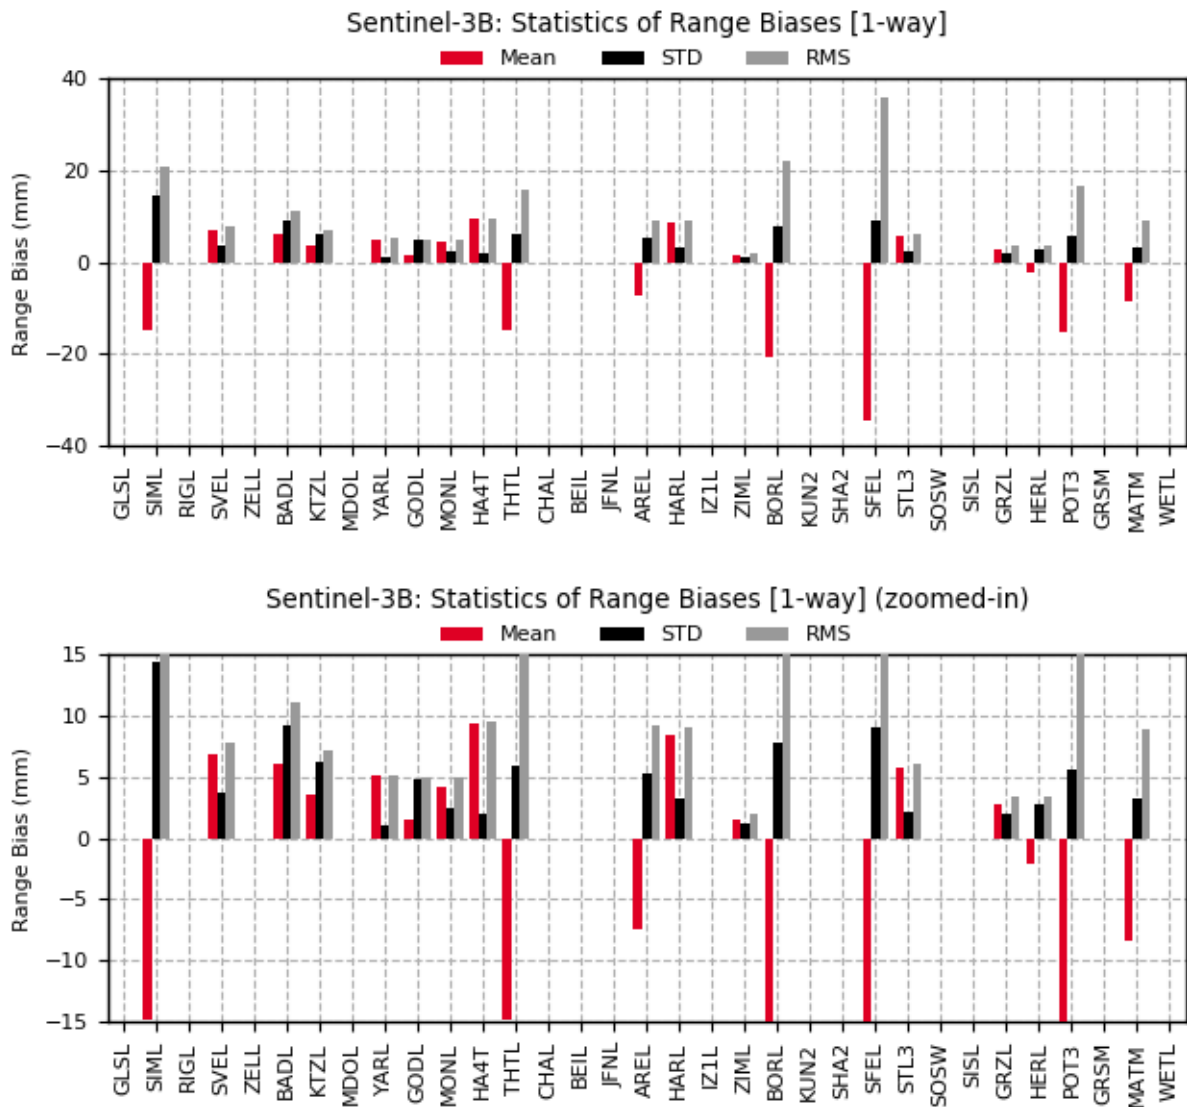


Figure 3-12: Mean, STD and RMS of the Sentinel-3B range biases [1-way; mm] of each SLR station (the figure below is a zoomed-in of the figure above)

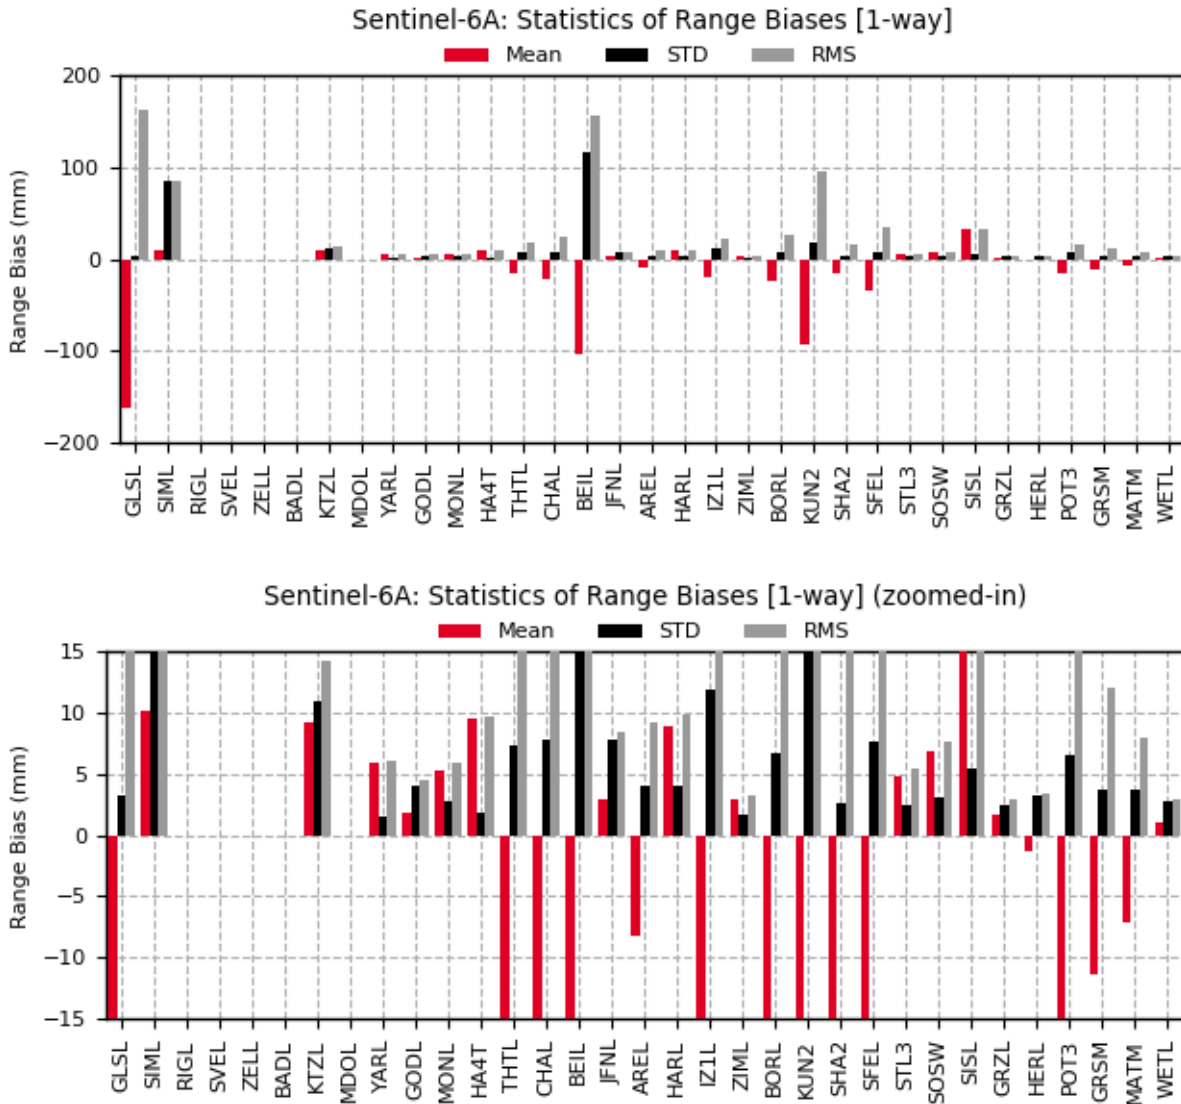


Figure 3-13: Mean, STD and RMS of the Sentinel-6A range biases [1-way; mm] of each SLR station (the figure below is a zoomed-in of the figure above)

Finally, following tables gather the mean value of the range biases estimated for each SLR station and Sentinel-3 and -6A satellites. These values have been fixed together with the corresponding COMB orbit solution on the processing to retrieve the SLR residuals shown in the following sub section.

Table 3-5: Mean value of the range biases [1-way; mm] of each SLR station tracking Sentinel-3A and Sentinel-3B satellites in 2022 used to calculate the SLR residuals

| SLR station | | Mean value [mm] | |
|-------------|------|-----------------|-------------|
| Monument | Code | Sentinel-3A | Sentinel-3B |
| 1824 | GLSL | -175.95 | - |
| 1873 | SIML | -20.02 | -14.75 |
| 1884 | RIGL | - | - |
| 1888 | SVEL | 6.72 | 6.85 |
| 1889 | ZELL | - | - |
| 1890 | BADL | 6.97 | 6.05 |

| SLR station | | Mean value [mm] | |
|-------------|------|-----------------|-------------|
| Monument | Code | Sentinel-3A | Sentinel-3B |
| 1893 | KTZL | 5.31 | 3.46 |
| 7090 | YARL | 4.84 | 5.03 |
| 7105 | GODL | 1.10 | 1.44 |
| 7110 | MONL | 3.98 | 4.22 |
| 7119 | HA4T | 9.49 | 9.36 |
| 7124 | THTL | -14.01 | -14.76 |
| 7237 | CHAL | - | - |
| 7249 | BEIL | - | - |
| 7396 | JFNL | - | - |
| 7403 | AREL | -6.53 | -7.45 |
| 7501 | HARL | 7.22 | 8.41 |
| 7701 | IZ1L | - | - |
| 7810 | ZIML | 1.42 | 1.50 |
| 7811 | BORL | -23.83 | -20.53 |
| 7819 | KUN2 | - | - |
| 7821 | SHA2 | - | - |
| 7824 | SFEL | -34.91 | -34.60 |
| 7825 | STL3 | 4.51 | 5.70 |
| 7827 | SOSW | - | - |
| 7838 | SISL | - | - |
| 7839 | GRZL | 2.30 | 2.73 |
| 7840 | HERL | -2.29 | -2.09 |
| 7841 | POT3 | -15.72 | -15.33 |
| 7845 | GRSM | - | - |
| 7941 | MATM | -7.85 | -8.34 |
| 8834 | WETL | - | - |

Table 3-6: Mean value of the range biases [1-way; mm] of each SLR station tracking Sentinel-6A satellite in 2022 used to calculate the SLR residuals

| SLR station | | Mean value [mm] |
|-------------|------|-----------------|
| Monument | Code | Sentinel-6A |
| 1824 | GLSL | -162.38 |
| 1873 | SIML | 10.14 |
| 1884 | RIGL | - |
| 1888 | SVEL | - |
| 1889 | ZELL | - |
| 1890 | BADL | - |
| 1893 | KTZL | 9.12 |
| 7090 | YARL | 5.85 |
| 7105 | GODL | 1.88 |
| 7110 | MONL | 5.29 |
| 7119 | HA4T | 9.42 |
| 7124 | THTL | -15.39 |
| 7237 | CHAL | -22.50 |

| SLR station | | Mean value [mm] |
|-------------|------|-----------------|
| Monument | Code | Sentinel-6A |
| 7249 | BEIL | -102.60 |
| 7396 | JFNL | 2.96 |
| 7403 | AREL | -8.28 |
| 7501 | HARL | 8.91 |
| 7701 | IZ1L | -19.23 |
| 7810 | ZIML | 2.84 |
| 7811 | BORL | -24.80 |
| 7819 | KUN2 | -93.42 |
| 7821 | SHA2 | -16.47 |
| 7824 | SFEL | -33.45 |
| 7825 | STL3 | 4.83 |
| 7827 | SOSW | 6.86 |
| 7838 | SISL | 32.27 |
| 7839 | GRZL | 1.68 |
| 7840 | HERL | -1.25 |
| 7841 | POT3 | -15.23 |
| 7845 | GRSM | -11.34 |
| 7941 | MATM | -7.11 |
| 8834 | WETL | 1.00 |

3.3. SLR RESIDUALS PER ORBIT SOLUTION

This subsection shows the SLR residuals obtained by the CNES, CPOF and COMB orbit solution, before and after applying the range biases estimated above.

Note that a filtering criterion has been applied to the calculation of the SLR residuals in order not to harm the final statistics obtained for each orbit solution. If there are white gaps of data on particular days in any plot, it is as a result of missing orbit solutions due to either manoeuvres or gaps of data.

From the analysis of the figures below, it can be said that removing the range biases has a positive effect on the standard deviation and root mean square statistics of all orbit solutions. After having fixed them, all orbit solutions have obtained reduced figures on such statistics. In addition, removing the range biases has led the mean value of the different orbit solutions to alternate more between positive and negative values. Note that the vast majority of the mean values are only positive if the range biases are not fixed.

Therefore, it can be concluded that the validation of the different Sentinel-3 and Sentinel-6A orbit solutions improves if the range biases of the SLR stations are fixed. However, further studies must be done to better locate the origin of the error since possible orbit biases or station coordinate uncertainties are being hidden into the estimation of the range biases.

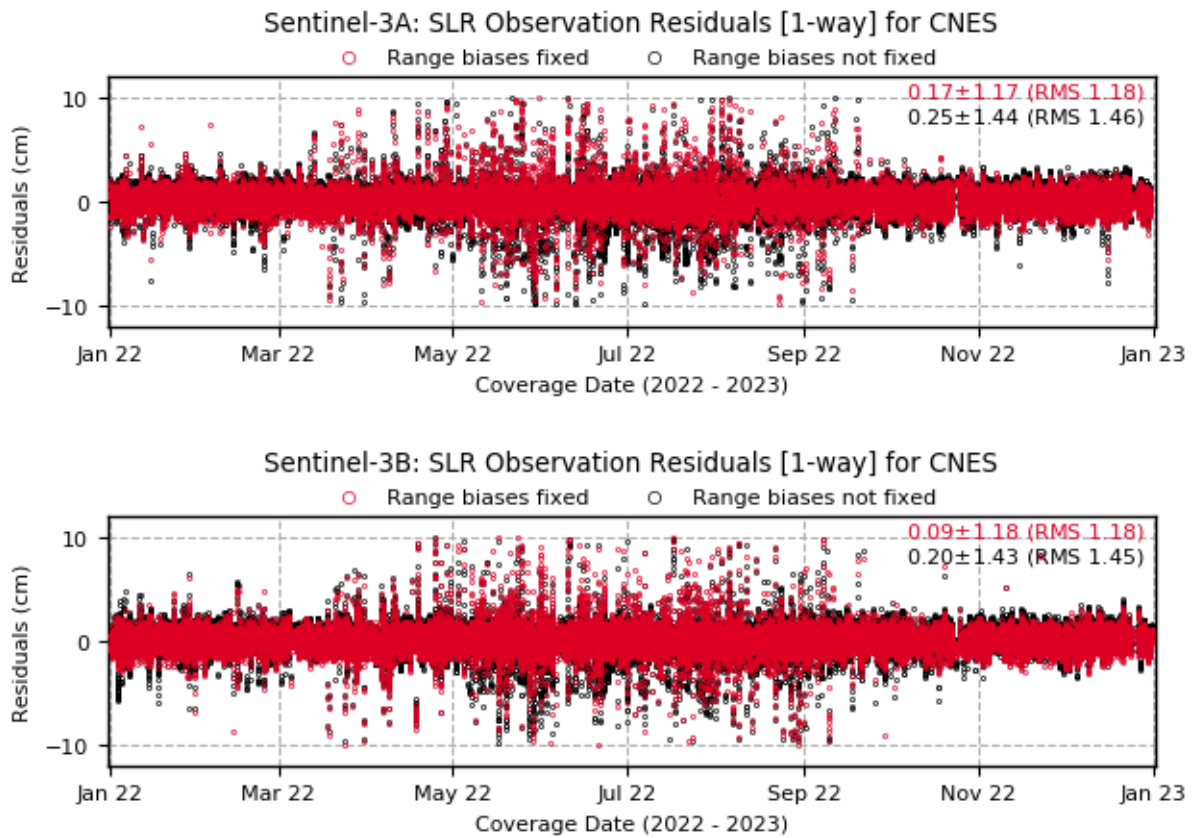


Figure 3-14: SLR observation residuals [1-way; cm] obtained for CNES orbit solution in 2022 (above Sentinel-3A, and below Sentinel-3B)

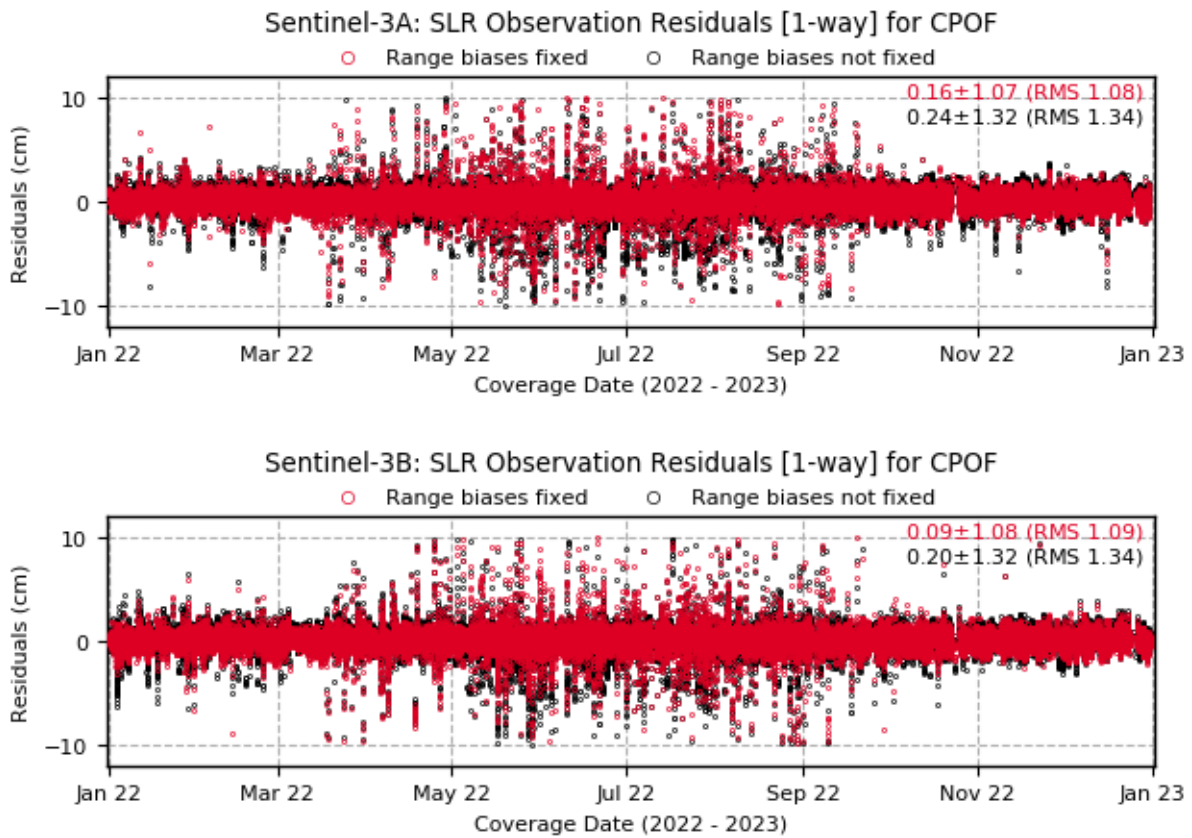


Figure 3-15: SLR observation residuals [1-way; cm] obtained for CPOF orbit solution in 2022 (above Sentinel-3A, and below Sentinel-3B)

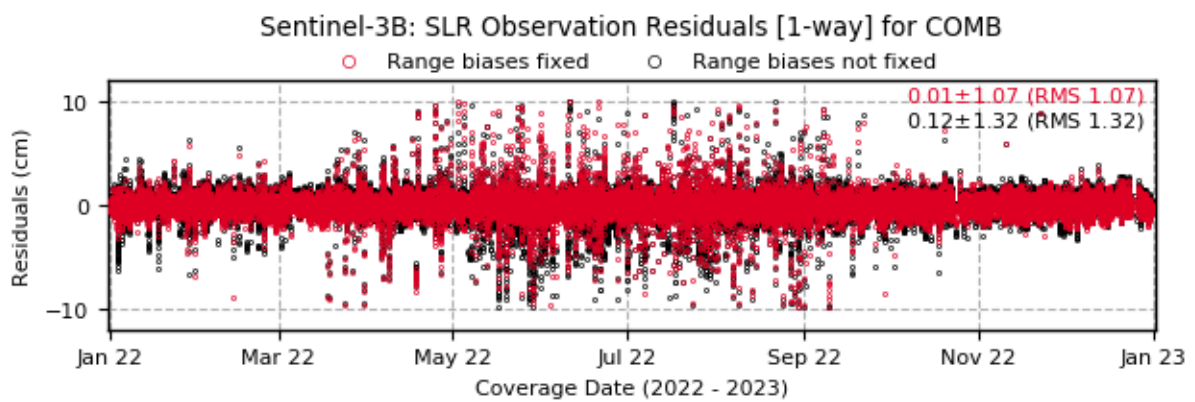
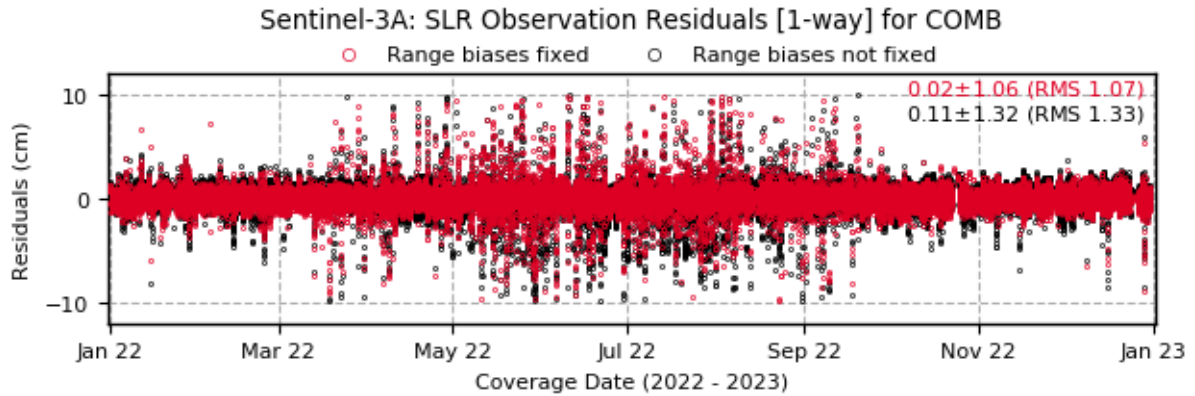


Figure 3-16: SLR observation residuals [1-way; cm] obtained for COMB orbit solution in 2022 (above Sentinel-3A, and below Sentinel-3B)

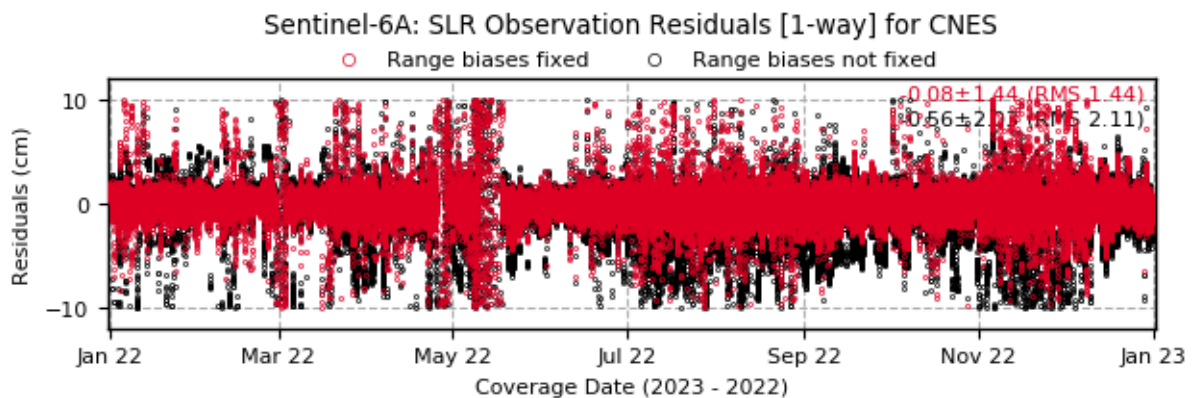


Figure 3-17: SLR observation residuals [1-way; cm] obtained for CNES orbit solution in 2022 (Sentinel-6A)

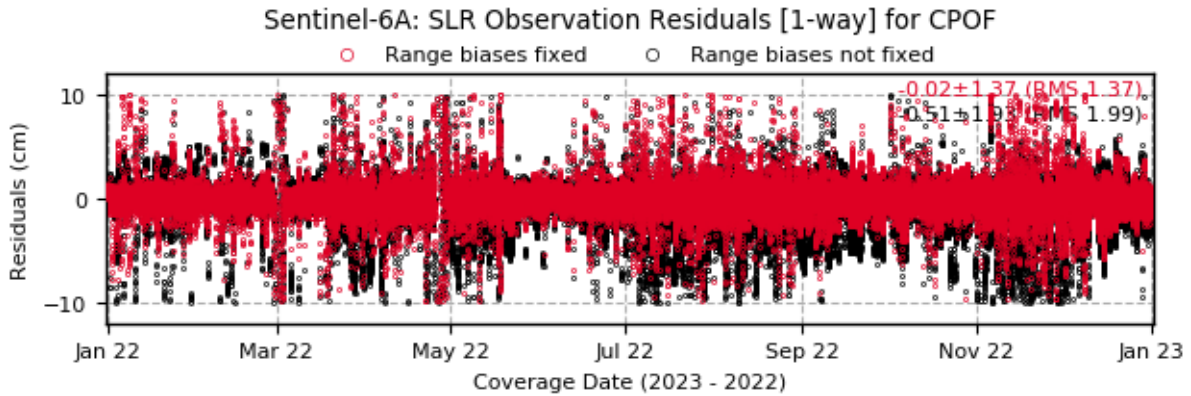


Figure 3-18: SLR observation residuals [1-way; cm] obtained for CPOF orbit solution in 2022 (Sentinel-6A)

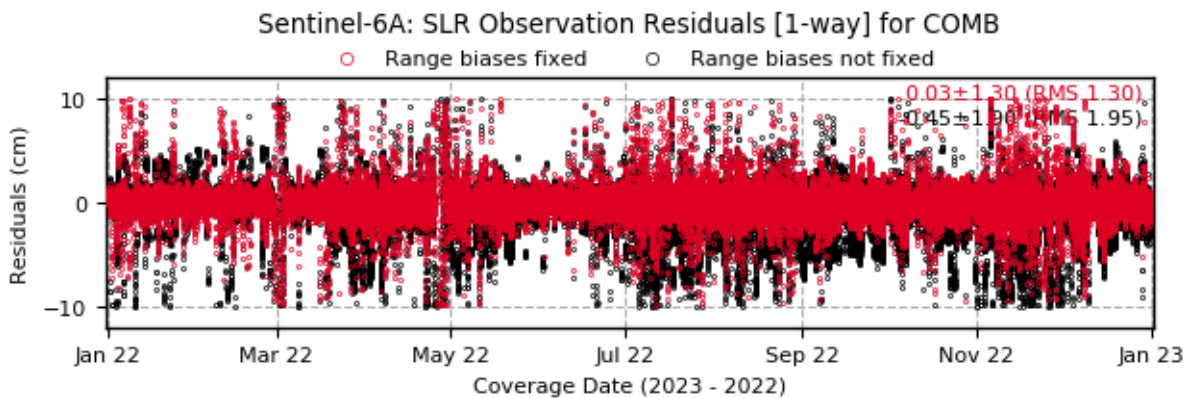


Figure 3-19: SLR observation residuals [1-way; cm] obtained for COMB orbit solution in 2022 (Sentinel-6A)

Finally, the information of the SLR residuals presented above has been summarised in the following two figures and Table 3-7 by showing the mean, standard deviation and root mean square statistics altogether per Sentinel-3 and Sentinel-6A satellites.

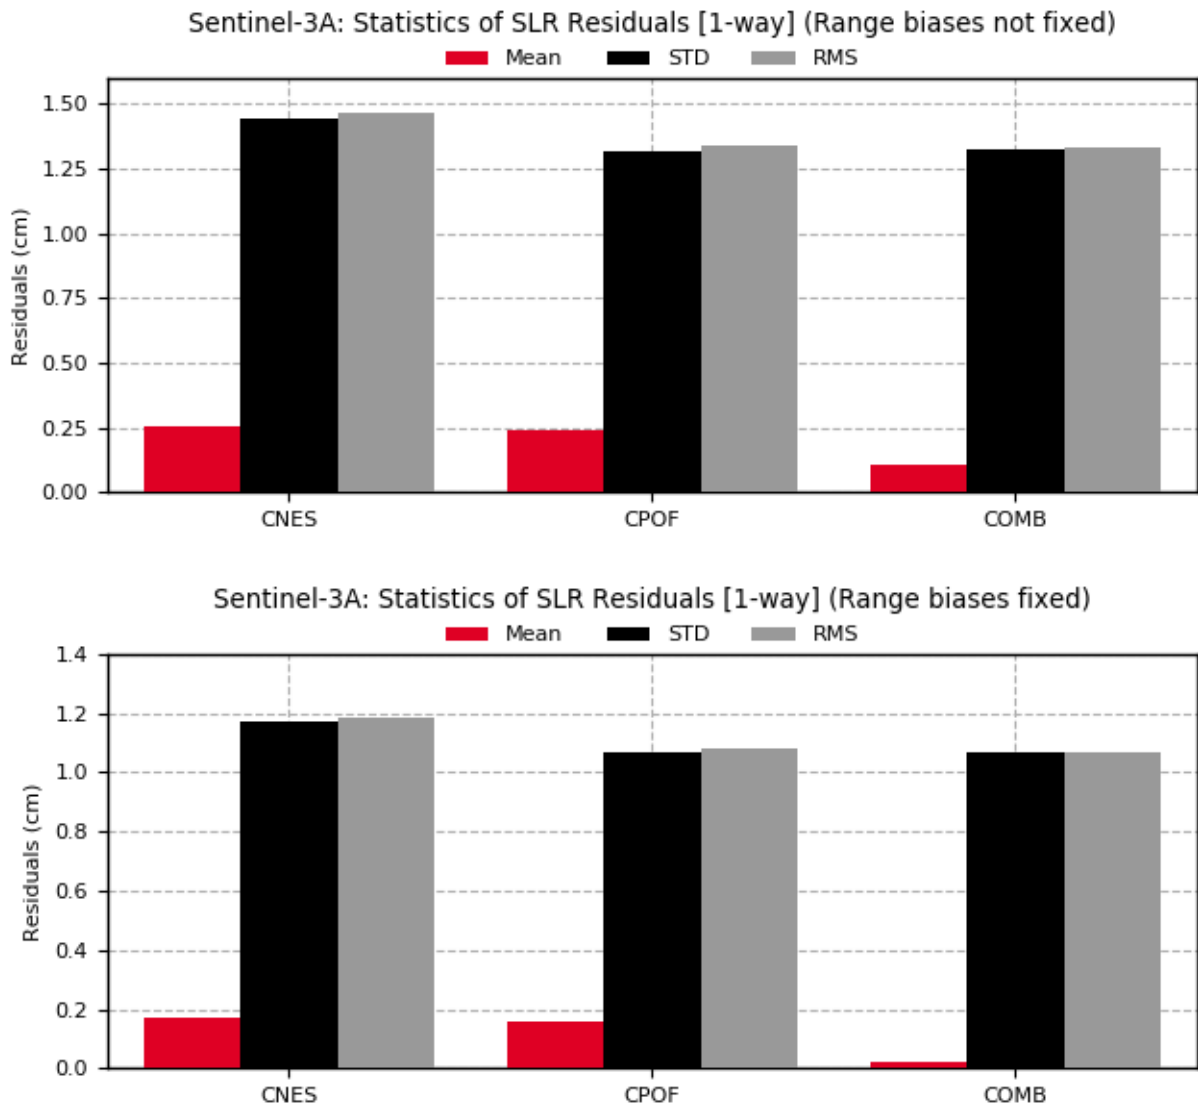


Figure 3-20: Mean, STD and RMS of the Sentinel-3A SLR observation residuals [1-way; cm] from all orbit solutions in 2022 (above the range biases have not been fixed, below the range biases have been fixed)

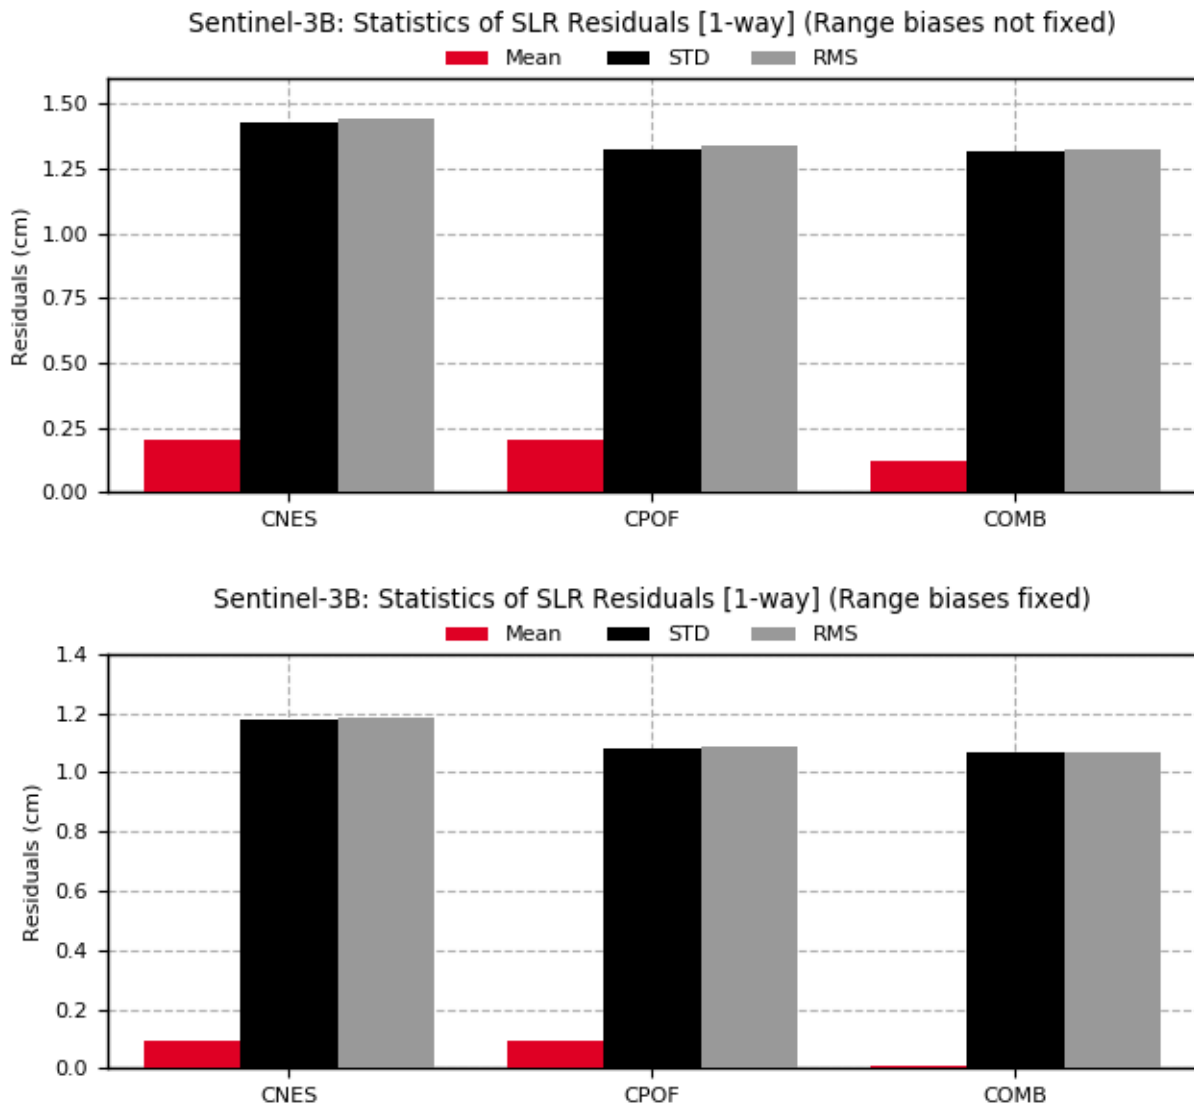


Figure 3-21: Mean, STD and RMS of the Sentinel-3B SLR observation residuals [1-way; cm] from all orbit solutions in 2022 (above the range biases have not been fixed, below the range biases have been fixed)

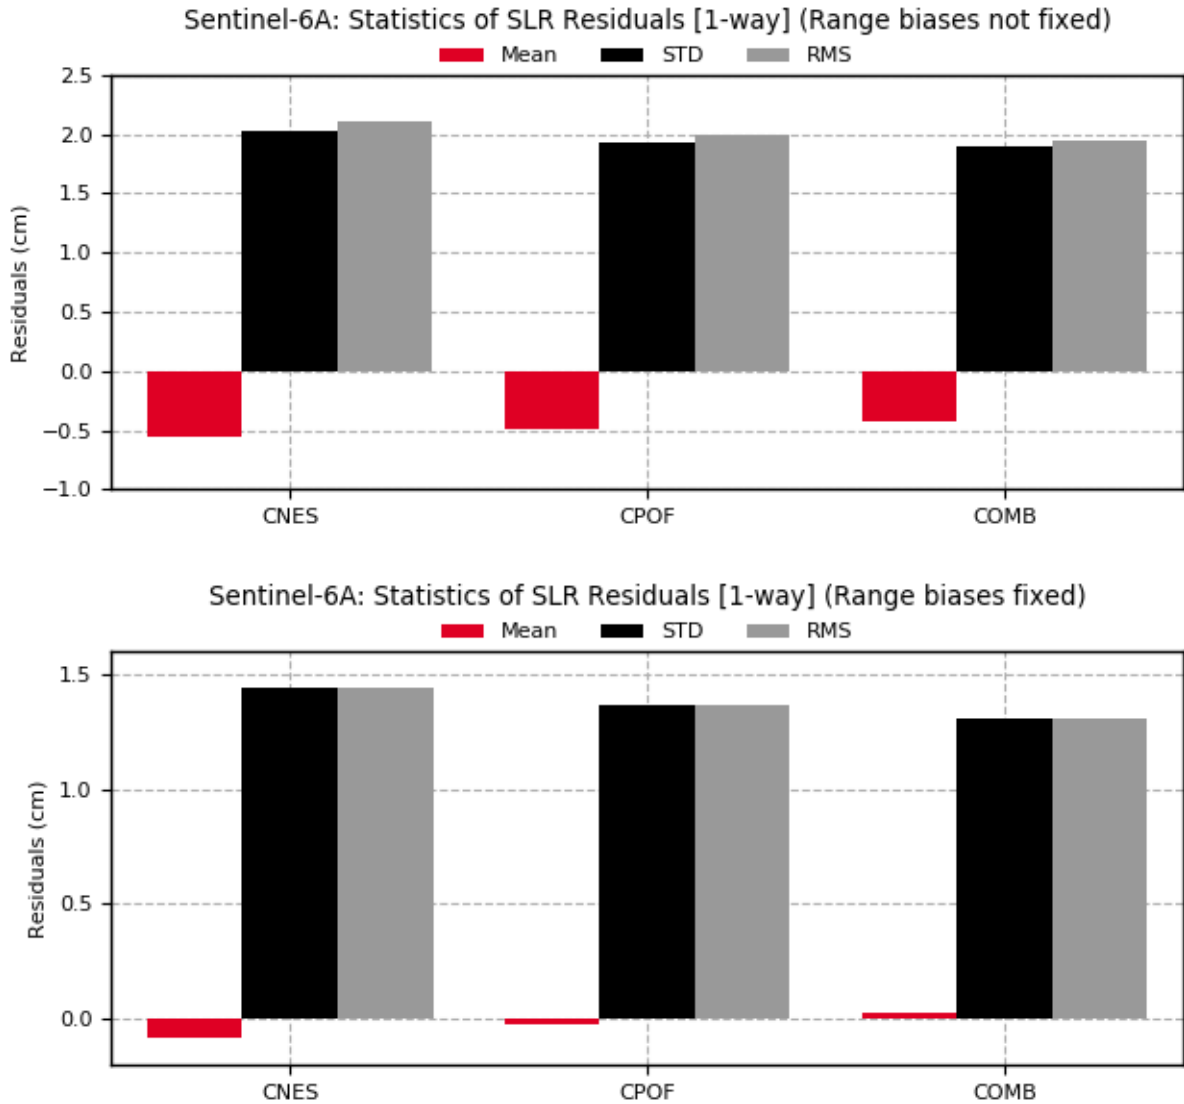


Figure 3-22: Mean, STD and RMS of the Sentinel-6A SLR observation residuals [1-way; cm] from all orbit solutions in 2022 (above the range biases have not been fixed, below the range biases have been fixed)

Finally, all the statistics of the sub section have been gathered in Table 3-7 and Table 3-8.

Table 3-7: Summary of the mean, STD and RMS of the Sentinel-3A and Sentinel-3B SLR observation residuals [1-way; cm] obtained from all orbit solutions in 2022

| Orbit solution | Sentinel-3A [1-way; cm] | | | | | | Sentinel-3B [1-way; cm] | | | | | |
|----------------|-------------------------|--------------------|------------------------|--------------------|------------------------|--------------------|-------------------------|--------------------|------------------------|--------------------|------------------------|--------------------|
| | Mean | | STD | | RMS | | Mean | | STD | | RMS | |
| | Range biases not fixed | Range biases fixed | Range biases not fixed | Range biases fixed | Range biases not fixed | Range biases fixed | Range biases not fixed | Range biases fixed | Range biases not fixed | Range biases fixed | Range biases not fixed | Range biases fixed |
| CNES | 0.25 | 0.17 | 1.44 | 1.17 | 1.46 | 1.18 | 0.20 | 0.09 | 1.43 | 1.18 | 1.45 | 1.18 |
| CPOF | 0.24 | 0.16 | 1.32 | 1.07 | 1.34 | 1.08 | 0.20 | 0.09 | 1.32 | 1.08 | 1.34 | 1.09 |
| COMB | 0.11 | 0.02 | 1.32 | 1.06 | 1.33 | 1.07 | 0.12 | 0.01 | 1.32 | 1.07 | 1.32 | 1.07 |

Table 3-8: Summary of the mean, STD and RMS of the Sentinel-6A SLR observation residuals [1-way; cm] obtained from all orbit solutions in 2022

| Orbit solution | Sentinel-6A [1-way; cm] | | | | | |
|----------------|-------------------------|--------------------|------------------------|--------------------|------------------------|--------------------|
| | Mean | | STD | | RMS | |
| | Range biases not fixed | Range biases fixed | Range biases not fixed | Range biases fixed | Range biases not fixed | Range biases fixed |
| CNES | -0.56 | -0.08 | 2.03 | 1.44 | 2.11 | 1.44 |
| CPOF | -0.51 | -0.02 | 1.93 | 1.37 | 1.99 | 1.37 |
| COMB | -0.45 | 0.03 | 1.90 | 1.30 | 1.95 | 1.30 |

4. CPF PREDICTIONS

To allow the SLR tracking of the Sentinel-3 satellites, the CPOD Service makes available the so-called **Consolidated Prediction Files (CPFs)** to the SLR stations, which contain the orbital prediction of the Sentinel-3 satellites. These files are daily created after the generation of the Sentinel-3 CPOD Short-Time Critical (STC) products and contain a 7-day prediction with respect to the generation time. On 2022, the number of generated CPF predictions was **425/425** for each of the Sentinel-3A/B satellites, which coincides with the total number of the expected files.

It is important to point out that the CPOD Service informs the ILRS community about possible degraded CPF prediction files as a result of satellite manoeuvres. The CPF files generated on manoeuvre days might be generated with a significant loss of accuracy in the prediction, and this fact might consequently pose a difficulty for the tracking of both satellites. The list of days were Sentinel-3 satellites were manoeuvred in 2022 is summarised in Table 4-1.

Table 4-1: Manoeuvre days on the Sentinel-3 satellites during 2022

| Sentinel-3A | Sentinel-3B |
|-------------|-------------|
| 2022/01/07 | 2022/01/12 |
| 2022/01/07 | 2022/02/02 |
| 2022/01/19 | 2022/03/16 |
| 2022/02/23 | 2022/04/06 |
| 2022/03/13 | 2022/04/27 |
| 2022/04/13 | 2022/05/24 |
| 2022/05/18 | 2022/06/29 |
| 2022/06/14 | 2022/08/09 |
| 2022/07/21 | 2022/09/21 |
| 2022/08/25 | 2022/10/06 |
| 2022/10/06 | 2022/10/20 |
| 2022/10/31 | 2022/11/22 |
| 2022/11/22 | 2022/12/21 |
| 2022/12/08 | |
| 2022/12/28 | |

Figure 4-1 shows the quality of the CPF predicted files delivered by the CPOD Service, as compared against the Sentinel-3 CPOD STC products. It must be considered that the CPF files contain predictions of the satellite orbit, whereas the STC products are determinations of the satellite orbit. As the CPF files are daily delivered, the figure below only takes into account the first predicted orbit to perform the comparisons, and the outcome is only shown for the 3D RMS. The statistical results for each component are summarised in Table 4-2.

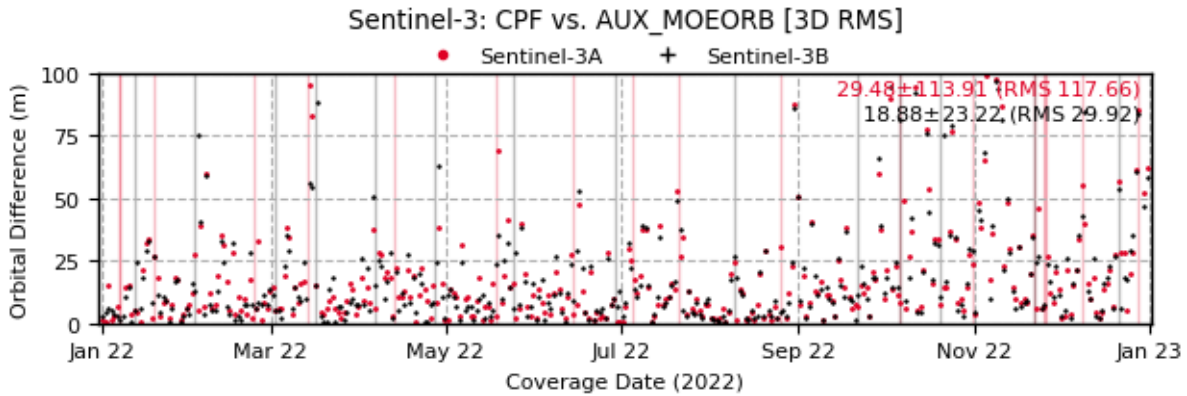


Figure 4-1: Orbital comparisons [3D RMS; m] between the Sentinel-3 CPF predictions and the Sentinel-3 CPOD STC products during 2022

Table 4-2: Summary of the mean, STD and RMS of the orbital comparisons between the Sentinel-3 CPF predictions and the Sentinel-3 CPOD STC products during 2022

| | Radial RMS [m] | | | Along-track RMS [m] | | | Cross-track RMS [m] | | | 3D RMS [m] | | |
|-------------|----------------|------|------|---------------------|-------|-------|---------------------|-------|-------|------------|-------|-------|
| | Mean | STD | RMS | Mean | STD | RMS | Mean | STD | RMS | Mean | STD | RMS |
| Sentinel-3A | 0.48 | 2.63 | 2.68 | 28.21 | 106.1 | 109.8 | 2.59 | 42.23 | 42.31 | 29.48 | 113.9 | 117.7 |
| Sentinel-3B | 0.24 | 0.24 | 0.34 | 18.87 | 23.22 | 29.92 | 0.19 | 0.27 | 0.33 | 18.88 | 23.22 | 29.92 |

The along-track is less accurate than the other components, as it is highly correlated with uncertainties on the drag modelling.

Finally, Table 4-3 gathers the percentage of the CPF files that have achieved a certain accuracy criterion, which complements the results previously shown.

Table 4-3: Percentiles of the orbital comparisons [3D RMS] between the Sentinel-3 CPF predictions and the Sentinel-3 CPOD STC products during 2022

| Threshold | Product Accuracy | |
|-----------|--------------------------|-------------|
| | Percentage of Fulfilment | |
| | Sentinel-3A | Sentinel-3B |
| < 1 m | 2.19 % | 3.29 % |
| < 5 m | 23.56 % | 22.19 % |
| < 10 m | 43.56 % | 46.03 % |
| < 50 m | 91.78 % | 91.78 % |
| < 100 m | 98.08 % | 99.18 % |
| < 200 m | 98.90 % | 99.73 % |
| < 400 m | 98.90 % | 100.00 % |

5. CONCLUSIONS

This document gathers the 2022 yearly results related to the tracking of the Sentinel-3 and Sentinel-6A satellites from the SLR stations. The document is meant to stress the importance of the ILRS Community in the frame of the Sentinel-3 and Sentinel-6 missions. The main aspects to be highlighted are:

- The ILRS stations cooperate with the Copernicus POD (CPOD) Service and its QWG by tracking both Sentinels-3 and Sentinel-6A and supplying ranging measurements. Due to the number of available stations, an overall good geographical coverage is attained.
- The total number of satellite passes during 2022 has shown values between 50 and 150 passes for both Sentinel-3 satellites and slightly higher for Sentinel-6A.
- The observations provided by the ILRS stations are used by the CPOD QWG as an independent means to validate the orbital accuracy of the POD orbits. The comparisons have revealed a good agreement between them (keeping the 3D RMS of the residuals below 1.5 cm in mean), which improves the reliability of the CPOD products.
- A monthly range bias has been calculated per each SLR station in order to improve the statistical outcome of the SLR residuals. It has been shown that the use of these range biases benefits the final outcome.

6. ANNEX: STATIONS COORDINATE LIST

The following table lists all SLR stations that have tracked any of the two Sentinel-3 or Sentinel-6A satellites at least once during the complete satellite missions, and have been analysed in this document. The table includes not only the identification of the SLR stations but also the station coordinates and the eccentricities used for the calculation of the statistics throughout the document. The station coordinates are based on the SLRF2014 reference frame, particularly they have been extracted from the SINEX file "ITRF2014-ILRS-TRF.snz" published in the International Terrestrial Reference Frame (ITRF) website. Eccentricities are subtracted from SINEX file "ecc_une.snz" published in the ILRS website¹.

Table 6-1: Geographical location and coordinates (SLRF2014) of all SLR stations that have ever tracked Sentinel-3 and Sentinel-6 satellites

| Monument | Code | Location Name (Country) | Station Coordinates [m] | | | Eccentricities [m] | | | Allowed to Track S-3 Satellites |
|----------|------|---------------------------|-------------------------|--------------|--------------|--------------------|---------|--------|---------------------------------|
| | | | X | Y | Z | North | East | Up | |
| 1824 | GLSL | Golosiiv (Ukraine) | 3512989.111 | 2068968.912 | 4888817.398 | 0 | 0 | 0 | X |
| 1873 | SIML | Simeiz (Ukraine) | 3783902.507 | 2551404.979 | 4441257.696 | 0 | 0 | 0 | X |
| 1884 | RIGL | Riga (Latvia) | 3183895.637 | 1421497.208 | 5322803.793 | 0 | 0 | 0 | X |
| 1888 | SVEL | Svetloe (Russia) | 2730138.911 | 1562328.755 | 5529998.665 | 0 | 0 | 0 | X |
| 1889 | ZELL | Zelenchukskaya (Russia) | 3451135.973 | 3060335.220 | 4391970.306 | 0 | 0 | 0 | X |
| 1890 | BADL | Badary (Russia) | -838299.971 | 3865738.847 | 4987640.893 | 0 | 0 | 0 | X |
| 1893 | KTZL | Katsively (Ukraine) | 3785944.345 | 2550780.789 | 4439461.397 | 0 | 0 | 0 | X |
| 7090 | YARL | Yarragadee (Australia) | -2389007.534 | 5043329.447 | -3078524.223 | -0.0064 | 0.0194 | 3.1827 | X |
| 7105 | GODL | Greenbelt, MD (USA) | 1130719.438 | -4831350.580 | 3994106.573 | -0.0087 | -0.0327 | 3.1379 | X |
| 7110 | MONL | Monument Peak, CA (USA) | -2386278.627 | -4802353.816 | 3444881.772 | -0.0242 | -0.0148 | 3.1895 | X |
| 7119 | HA4T | Haleakala, Hawaii (USA) | -5466065.553 | -2404338.024 | 2242108.390 | 0.0029 | 0.0032 | 2.6304 | X |
| 7124 | THTL | Tahiti (French Polynesia) | -5246407.299 | -3077284.309 | -1913813.757 | -0.0150 | 0.0100 | 3.1410 | X |
| 7237 | CHAL | Changchun (China) | -2674387.081 | 3757189.194 | 4391508.287 | 0 | 0 | 0 | |
| 7249 | BEIL | Beijing (China) | -2148760.760 | 4426759.548 | 4044509.606 | 0 | 0 | 0 | X |
| 7396 | JFNL | Wuhan (China) | -2279755.681 | 5004737.434 | 3219791.739 | 0 | 0 | 0 | |

¹ https://ilrs.gsfc.nasa.gov/network/site_procedures/eccentricity.html

| Monument | Code | Location Name (Country) | Station Coordinates [m] | | | Eccentricities [m] | | | Allowed to Track S-3 Satellites |
|----------|------|-------------------------------|-------------------------|--------------|--------------|--------------------|---------|--------|---------------------------------|
| | | | X | Y | Z | North | East | Up | |
| 7403 | AREL | Arequipa (Peru) | 1942807.795 | -5804069.723 | -1796915.614 | 0.0140 | -0.0020 | 2.6790 | X |
| 7501 | HARL | Hartebeesthoek (South Africa) | 5085401.092 | 2668330.330 | -2768688.650 | -0.0040 | -0.0070 | 3.2270 | X |
| 7701 | IZ1L | Izaña (Tenerife), Spain | 5390375.882 | -1597788.073 | 3006931.878 | 0 | 0 | 0 | |
| 7810 | ZIML | Zimmerwald (Switzerland) | 4331283.311 | 567549.958 | 4633140.235 | 0 | 0 | 0 | X |
| 7811 | BORL | Borowiec (Poland) | 3738332.592 | 1148246.687 | 5021816.135 | 0 | 0 | 0 | X |
| 7819 | KUN2 | Kunming (China) | -1281301.323 | 5640724.593 | 2682905.687 | 0 | 0 | 0 | |
| 7821 | SHA2 | Shanghai (China) | -2830744.597 | 4676580.229 | 3275072.784 | 0 | 0 | 0 | X |
| 7824 | SFEL | San Fernando (Spain) | 5105473.580 | -555110.494 | 3769892.761 | 0 | 0 | 0 | X |
| 7825 | STL3 | Mt. Stromlo (Australia) | -4467064.778 | 2683034.887 | -3667007.319 | 0 | 0 | 0 | X |
| 7827 | SOSW | Wetzell, Germany | 4075530.996 | 931781.927 | 4801620.007 | 0 | 0 | 0 | |
| 7838 | SISL | Simosato (Japan) | -3822388.317 | 3699363.635 | 3507573.048 | 0 | 0 | 0 | |
| 7839 | GRZL | Graz (Austria) | 4194426.293 | 1162694.265 | 4647246.785 | 0 | 0 | 0 | X |
| 7840 | HERL | Herstmonceux (UK) | 4033463.542 | 23662.700 | 4924305.303 | 0 | 0 | 0 | X |
| 7841 | POT3 | Potsdam (Germany) | 3800432.096 | 881692.172 | 5029030.173 | 0 | 0 | 0 | X |
| 7845 | GRSM | Grasse, (France) | 4581692.003 | 556196.273 | 4389355.226 | 0 | 0 | 0 | |
| 7941 | MATM | Matera (Italy) | 4641978.617 | 1393067.723 | 4133249.623 | 0 | 0 | 0 | X |
| 8834 | WETL | Wetzell (Germany) | 4075576.651 | 931785.679 | 4801583.698 | 0 | 0 | 0 | |



| | |
|---------------|--------------------|
| Code: | GMV-CPOD-SLR-0007 |
| Date: | 29/03/2023 |
| Version: | 1.1 |
| ESA contract: | 4000132155/21/I-BG |
| Page: | 52 of 52 |

END OF DOCUMENT